



SAFETYNESTS

2025-2026

PRODUCTS CATALOG

WELCOME TO SAFETY NEST

Welcome to Safety Nests, your ultimate destination for high-quality safety products and services. We are a trusted link between quality safety product manufacturers and service providers to end-users. Our mission is to bridge the gap between manufacturers and customers, providing a seamless and efficient way to access the best safety products and services available.

****Our Story****

We understand that safety is a top priority in the workplace, and that's why we're committed to providing the highest quality products and services that meet the most stringent safety standards. Our team of experts works closely with manufacturers to ensure that every product that reaches our customers meets the highest standards of quality, reliability, and safety.

****Our Values****

Quality** We're committed to providing the highest quality products and services that meet the most stringent safety standards.

Customer Service** We're dedicated to providing exceptional customer service and support to ensure that you're completely satisfied with your purchase.

Expertise** Our team of experts works closely with manufacturers to ensure that every product that reaches our customers meets the highest standards of quality, reliability, and safety.

Innovation:** We're constantly looking for new and innovative ways to improve our products and services, and to stay ahead of the curve in terms of safety and compliance.

****Our Team****

At Safety Nests, we're a team of safety experts who are passionate about helping you create a safer and healthier work environment. We're dedicated to providing the highest quality products and services, and to delivering exceptional customer service and support.

ABOUT US

Welcome to Safety Nests, your ultimate destination for high-quality safety products and services. We are a trusted link between quality safety product manufacturers and service providers to end-users. Our product range includes cotton coveralls in normal and premium quality with flame retardant properties, safety shoes in basic and EN standard, helmets, safety glasses, gloves, vests, and fall arrestors with harness and lanyards. At Safety Nests, we believe in providing the best quality products and services to our customers. Our team of experts works tirelessly to ensure that all our products meet the required safety standards and regulations.

We understand the importance of safety in the workplace and strive to provide products that can help prevent accidents and injuries. We are committed to building long-term relationships with our customers and providing them with the best possible experience. Whether you are an individual or a business, we have a wide range of products and services to meet your needs. At Safety Nests, your safety is our top priority.

Our goal is to be the go-to destination for all your safety needs, providing you with peace of mind and confidence in the workplace.

At Safety Nests, we are passionate about safety and dedicated to helping you create a safer and healthier work environment. With our extensive range of safety products and services, you can trust us to provide you with the best possible solution for your safety needs.

INDEX

	Head Protection.....	01-11
	Eye Protection.....	13-18
	Hearing Protection.....	20-22
	Respiratory protection.....	24-27
	Personal Protection	29-53
	Foot Protection.....	54-85
	Hand Protection.....	87-102
	Fall Protection.....	104-116
	Flash Light.....	117

HEAD PROTECTION



SAFETYNESTS



VENUS HP-2000 Series Shell White



Venus H-2000 series of hard hats has a contemporary design, along with economy and comfort. It is versatile to fit a variety of users with their variety of applications. The H-2000 series comes with a rain trough and universal accessory slots. It offers the choice between multicolor shell with ratchet adjustments of a nylon-webbing 4-points suspension. The H-2000 series is ideal for environments where vertical impact on the head is a risk.



VENUS HP-2000 Series Shell White



- Non-Ventilated
- Color : White
- Material : High Density Polyethylene
- Closure Type : Ratchet

Provide protection against electrical hazards upto 20000 volts Sleek & attractive design high density polyethylene shell Large printing surfaces for great custom logo's on front, sides & back Shell has rain trough for extra convenience Comfortable pin lock or exclusive "Fit-Lock" ratchet adjustment suspensions Accessory slots & chin strap attachments

Standard & Class

- a. IS 2925:1984 Specification for industrial safety helmet
- b. ANSI/ISEA Z89.1-2014 American National Standard for Industrial Head Protection Type 1, Class E or Class C



HEAD PROTECTION



Ridgeline® Cap Style

ANSI • CSA • (with clip only)

Shell constructed from ABS material // Low profile design //

Available with 4- point and 6-point ratchet suspensions / Swinging hinge points // 4-position harness // Adjusts from 6.5 - 8 //

Rear padded suspension // Replacement suspensions available // Vented pressure pad // Universal accessory slots // Passes

Reverse Orientation, High-Temperature (HT) and Low Temperature (LT) // Vented cap style hard hats are rated Class C and do not meet Class E or G safety standards
Custom imprinting available

Hydro Dipped

P 800.736.8673 // F 901.861.4967 // W
PYRAMEX.COM

4-Point Ratchet Hydro Dipped | 10 Variations

Materials

Shell: high impact acrylonitrile-butadiene-styrene (ABS)

Suspension: high density polyethylene (HDPE) & high impact nylon

Sweat band: polyester fabric & polyurethane (PU) foam



Vented Hydro Dipped

4-Point Ratchet Hydro Dipped | 2 Variations

- HP44116SV • Shiny White Graphite Pattern
- HP44117V • Matte Black Graphite Pattern



HPRBANDR – Ridgeline Cap Style and Full Brim Hard Hat Sweat Band



HPR441 – 4-point Ratchet Replacement Suspension



HPR461 – 6-point Ratchet Replacement Suspension



HEAD PROTECTION



Ridgeline® Full Brim ANSI • CSA



Shell constructed from ABS material // Ratchet suspension is easy to adjust, allowing you to modify the fit while wearing the hat // Available in 4-point and 6-point ratchet suspension / 4-point ratchet suspension may be converted to



6-point ratchet suspension with optional strap [HP6ptsus) Replaceable ratchet suspensions available / Replaceable

sweat band— padded fabric and polyurethane foam // Passes high temperature (HT) and low temperature [LT) // Non-vented options meet Class E, G, and C // Hi-vis colors have been tested for the HV mark / Custom imprinting available



Vented Full Brim

4-Point Ratchet Vented | 8 Variations






-  HP54110V •• White
-  HP54111V •• Black
-  HP54113V •• Slate Gray
-  HP54130V •• Yellow
-  HP54131V •• Hi-vis Lime
-  HP54141V •• Hi-vis Orange
-  HP54160V •• Blue
-  HP54117V •• Matte Black Graphite

Standard Full Brim

4-Point Ratchet | 11 Variations

-  HP54110 •• White
-  HP54111 •• Black
-  HP54112 •• Gray
-  HP54113 •• Slate Gray
-  HP54120 •• Red
-  HP54130 •• Yellow
-  HP54131 •• Hi-vis Lime
-  HP54135 •• Green
-  HP54141 •• Hi-vis Orange
-  HP54160 •• Blue
-  HP54170 •• Pink

6-Point Ratchet | 5 Variations

-  HP56110 • White
-  HP56120 • Red
-  HP56130 • Yellow
-  HP56135 • Green
-  HP56160 • Blue



Materials

Shell: high impact acrylonitrile-butadiene-styrene (ABS)
Suspension: high density polyethylene (HDPE) & high impact nylon
Sweat band: polyester fabric & polyurethane (PU) foam

General Specifications

Weight: 378 gm
Shell thickness: 1.7 - 4 mm
Dimensions: 31 cm x 27 cm x 15.2 cm
Suspension adjust sizing: 6.5 - 8
Suspensions: 4-point suspension may be converted to 6-point suspension with optional strap
Standards: ANSI/ISEA Z89.1-2014 and Cert. Mod. - CAN/CSA Z94.1-15
Types: Type 1
Classes: Class E, G, and C (Vented: Class C only)
Optional features: hi-vis colors (HV), lower temperature [LT), higher temperature (HT)

Markings

Types: Type 1 offers protection to the top of the head
Classes: Class E (electrical) rated for 20,000 volts | Class G (general) rated for 2,200 volts | Class C (conductive) does not offer electrical protection
HV: meets all requirements for high visibility
LT: provides protection at low temperatures -22°F
HT: provides protection at high temperatures 140°F
Date code: indicates month and year when the shell was molded – does not indicate service life



Product Guidelines

Maximum service life of 5 years (shell) & 1 year (suspension) from the time of first use
Never alter or modify the shell or suspension system
Inspect the hard hat each time before use and replace if there is ANY sign of damage
Replace hard hat after it receives a considerable impact
Accessories such as liners have not been tested to the requirement of this standard
Clean only with mild soap and lukewarm water
Store hard hat in a clean, dry place that is out of direct sunlight
Do not use paints, chemicals, adhesives, gasoline or similar substances on the hard hat
Labels are acceptable if they do not affect a hard hat's protective rating or make it difficult to find damage



HPR541 — 4-Point Ratchet Replacement Suspension



HP6PTSUS — 6-Point Suspension Strap





SL T2™ FRONT BRIM ENGINEERED PROTECTION THAT SURROUNDS

Elevate the SL T2 Safety Helmet with the SL T2 Front Brim, crafted for extended sun and rain protection. This innovative brim swiftly clips into the helmet, providing additional coverage without compromising upward visibility.



SL T2™ FRONT BRIM INSTRUCTIONS

TO ATTACH FRONT BRIM TO HELMET

1. Turn the helmet upside down, ensuring the brim is also upside down.
2. Align the slots on the brim with the two slots on the inside front of the helmet, located in front of the slots for the replaceable chin strap.
3. Push firmly to click them into place, ensuring a secure attachment.

TO REMOVE FRONT BRIM FROM HELMET

1. Firmly grasp the clip where it attaches to the helmet.
2. Pull out to detach the brim from the helmet.





SL T2TM VISOR ENGINEERED PROTECTION THAT SURROUNDS

The SL T2 Visor is a game changer in visor protection for the SL T2 Safety Helmet. Designed to provide exceptional eye protection and convenience, combining functionality with style, making it an essential accessory for professionals in various industries.



SL T2TM VISOR

ENGINEERED PROTECTION THAT SURROUNDS

The SL T2 Visor is a game changer in visor protection for the SL T2 Safety Helmet. Designed to provide exceptional eye protection and convenience, combining functionality with style, making it an essential accessory for professionals in various industries.

- VISORS**
- HPT2HV10T Clear AF
 - HPT2HV20T Gray AF





HEAD PROTECTION



RATCHET SUSPENSION



DURABLE ABS SHELL



ACCESSORY COMPATIBLE



VENTED OPTONS



COMFORTABLE PADDING



SL T2™ SAFETY HELMET

ENGINEERED PROTECTION THAT SURROUNDS

Experience unparalleled protection with the SL T2 Safety Helmet. Featuring advanced EPS foam that absorbs impacts from all angles, coupled with a lightweight ABS shell. The helmet is compatible with SL T2

accessories for customized safety solutions. All-day comfort is ensured with strategically placed padding and effortless ratchet suspension adjustment. The 4-point cross-over chin strap secures the helmet for confident performance. Available in vented and non-vented options.



RATCHET SUSPENSION



DURABLE ABS SHELL



ACCESSORY COMPATIBLE



VENTED OPTONS



COMFORTABLE PADDING

VENTED Ratchet Suspension | 5 Variations

- HPT261110V White
- HPT261111V Black
- HPT261162V Light Blue
- HPT261130V Yellow
- HPT261140V Orange



SL T2™ VISOR

ENGINEERED PROTECTION THAT SURROUNDS

NON-VENTED Ratchet Suspension | 5 Variations

- HPT261110V White
- HPT261111V Black
- HPT261162V Light Blue
- HPT261130V Yellow
- HPT261140V Orange



Experience unparalleled protection with the SL T2 Safety Helmet. Featuring advanced EPS foam that absorbs impacts from all angles, coupled with a lightweight ABS shell. The helmet is compatible with SL T2 accessories for customized safety solutions. All-day comfort is ensured with effortless ratchet suspension adjustment. The 4-point cross-over chin strap secures the helmet. Available in vented and non-vented options.

EYE PROTECTION



SAFETYNESTS



EYE EPD | PREMIUM, ACE SERIES - IS



PROTECTIVE SPECTACLES

Stylish Protective Spectacle
One size fits all



ANSI Z87.1 CML 0002915463

VENUS E-311 (G-331)

Protective Spectacle

Style

- Double moulded built in full face foam / brow pad prevents slipping even in tough working environment, one size fits all.
- Quality mark for assured performance.

Temple - Headband

- Quick release for Temple / headband interchange gives users immense flexibility.
- Co-mould Temple with soft TPE material for comfort.
- Metal free screw-less dielectric safety design

Lens

- Dual lens Wrap round with 8 base curve stylish design,
- Hard coated lens designed to be abrasion resistant, good visibility.
- High impact resistant for eye protection



VENUS E-311



Product	Item #	Colour	Packing	Type
VENUS E-311	11023	CLEAR	Pack of 20	CHC With Elastic head band



VENUS E-307

Item #	Colour	Packing	Type
11011	CLEAR	Pack of 15	CHC

VENUS E-307 (G-307)

Protective Spectacle

Style

- Sporty design with a modern frame
- Wrap round stylish design for enhanced protection.
- Quality mark for assured performance.

Temple

- Nylon temple high Comfort with flexible tips.

Lens

- Hard coated lens designed to be abrasion resistant, good visibility.
- High impact resistant & UV protection

Nose bridge

- Soft TPE nose pads for higher comfort

VENUS E-306 & VENUS E-305 (G-306 & G-305)

Protective Spectacle

Style

- Wrap round stylish design for enhanced protection.
- Quality mark for assured performance.

Temple

- Ventilated TPE temple prevents slippage with PC insert (E-306)
- PC temple with soft TPE tips prevents slippage (E-305)

Lens

- Anti Fog lens, hard coated designed to be abrasion resistant, good visibility.
- High impact resistant & UV protection

Nose bridge

- One piece integrated design, no lose parts.



VENUS E-306



VENUS E-305

VENUS E-306-AF

Item #	Lens Colour	Type	Temple Colour
11017	Clear	CHC - AF	RED
11018	Clear	CHC - AF	YELLOW
11019	Clear	CHC - AF	GREEN
11020	Clear	CHC - AF	BLACK
11021	Clear	CHC - AF	BLUE
11022	Clear	CHC - AF	VIOLET-BLUE

Packing: Pack of 20

VENUS E-305-AF

Item #	Lens Colour	Type	Temple Colour
11012	Clear	CHC - AF	RED
11013	Clear	CHC - AF	YELLOW
11014	Clear	CHC - AF	GREEN
11015	Clear	CHC - AF	BLACK
11016	Clear	CHC - AF	BLUE
11036	Clear	CHC - AF	VIOLET-BLUE

Packing: Pack of 20

APPLICATION EXAMPLES

Agriculture

Pesticide & Insecticide spraying

Battery

Lead handling

Cement

Crushing, Bagging, Cement handling

Ceramics

Material mixing

Chemical

Bulk drugs, Blending operation & Utility process

Construction

Chipping, grinding, masonry work, riveting and sanding & Demolition work

Engineering

Sand blasting, Powder coating, Buffing, Cutting

Mining

Drilling, Material handling

Pharmaceuticals

Bulk drugs, Material charging

Tyre

Carbon black

Misc.

Chipping, grinding, masonry work, riveting, cutting & sanding



Performance Eyewear



VENUS E-306-CHC-AF

Clear Glass

Lens

Polycarbonate Anti fog lens, Clear hard coated designed to be abrasion resistant & good visibility.

Temple

RED

Ventilated TPE temple prevents slippage with PC insert.



Nose bridge


One piece integrated design, no lose parts

Fit Type:
Regular

Style:

Wrap round stylish design for enhanced protection

VENUS E-311

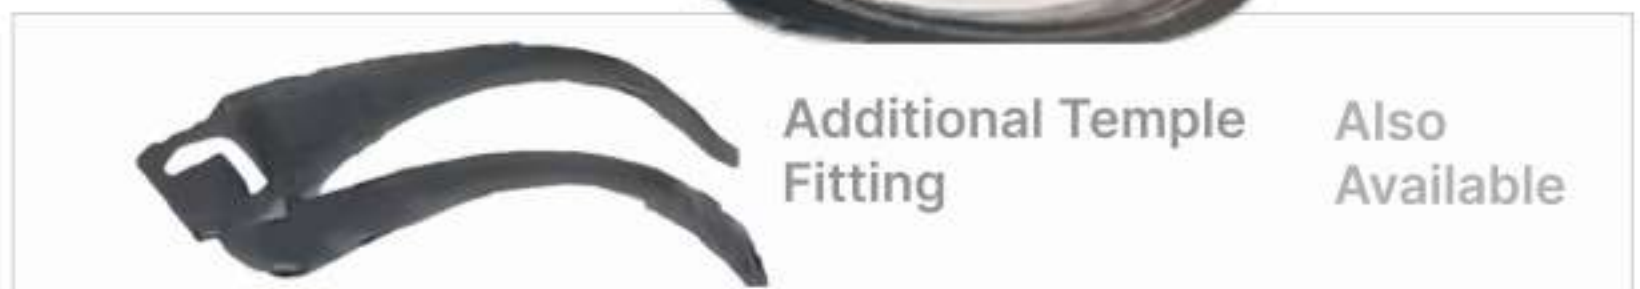

Additional Temple Fitting

Also Available

Reason to wear safety antifog glass

Combat heat and humidity.
Manage sudden environment changes.
Decrease fogging frustrations.
Enhance vision by increasing visibility.
Improve performance and efficiency.

Product	Item #	Colour	Packing	Type
VENUS E-311	11023	CLEAR	Pack of 20	CHC

With Elastic head band



Performance Eyewear

VENUS E-306-CHC-AF

Clear Glass



Reason to wear safety antifog glass

- Combat heat and humidity.
- Manage sudden environment changes.
- Decrease fogging frustrations.
- Enhance vision by increasing visibility.
- Improve performance and efficiency.



VENUS E-307 (G-307)

Protective Spectacle Style

- Sporty design with a modern frame
- Wrap round stylish design for enhanced protection.
- Quality mark for assured performance.

Temple

- Nylon temple high Comfort with flexible tips.

Lens

Hard coated lens designed to be abrasion resistant, good visibility.

- High impact resistant & UV protection

Nose bridge

- Soft TPE nose pads for higher comfort

VENUS E-306 & VENUS E-305 Protective Spectacle

Style

- Wrap round stylish design for enhanced protection.
- Quality mark for assured performance.

Temple

- Ventilated TPE temple prevents slippage with PC insert (E-306)
- PC temple with soft TPE tips prevents slippage (E-305)

Lens

- Anti Fog lens, hard coated designed to be abrasion resistant, good visibility.
- High impact resistant & UV protection

Nose bridge

- One piece integrated design, no lose parts.

VENUS E-306-AF

Item #	Colour	Lens Type	Temple Colour
11017	Clear	CHC-AF	RED
11018	Clear	CHC-AF	YELLOW
11019	Clear	CHC-AF	GREEN
11020	Clear	CHC-AF	BLACK
11021	Clear	CHC AF	BLUE
11022	Clear	CHC AF	VIOLET-BLUE

Packing Pack of 20

IS5983



ANSI Z87.1CM/
L0002915463
VENUS E-307

Item #	Colour	Packing	Type
11011	CLEAR	Pack of 15	CHC



VENUS E-306



VENUS E-305

VENUS E-305-AF

Item #	Lens	Colour
11012	Clear	RED
11013	Clear	YELLOW
11014	Clear	GREEN
11015	Clear	BLACK
11016	Clear	BLUE
11036	Clear	VIOLET-BLUE

Packing Pack of 20



Eye Protection

(EPD) - PREMIUM, ACE & UNIVERSAL SERIES

SAFETY EYEWEARS

Protection against high impact particles with features like Anti scratch / Anti-fog

CE
EN 166

Complies with
ANSI / ISEA Z87.1:2020



VENUS E-101

Type: CHC / GHC
Protective Spectacle



*VENUS E-305

Type: CHC-AF
Protective Spectacle

Temple
Colour



*VENUS E-102

Type: CHC-AF, GHC-AF, AHC,
Protective Spectacle

Temple
Colour



*VENUS E-306

Type: CHC-AF
Protective Spectacle

Temple
Colour




Features:



Temple

Polycarbonate temples with side shield & vent
PC temple with soft tips prevents slippage (E-305)
Coloured temple allows easy identification
Wide area for side protection (E-102)



Nose bridge

One piece in integrated design, no lose parts
Clear nose bridge integrated with frame gives comfortable nose fit



Lens

Anti-Fog hard coated lens designed to be abrasion resistant & provide good visibility
Provides good impact & UV protection

*Available Glass Color Shades



Clear Glass



Amber Glass



Dark Glass



PREMIUM, ACE UNIVERSAL SERIES

SAFETY GOGGLES

Dust & Liquid splash protection

Products available with below approvals

ANSI 287.1:2003



VENUS E-507-CHC-AF

Safety Goggle

- Style Over the glass compatibility
Protections from liquid splash and dust particles
- Indirect Double injection frame with soft nose bridge For nasal
ventilation comfort
- Head band Superior textile headband for greater comforts

- S Base curve spherical lens design for wide field of vision
- High impact resistant & UV protection
- Anti Fog lens, Hard coating makes the lens extremely resistant to scratches and chemicals

Product Ten #
VENUS 3-507 11001

Side hook & back adjuster available



VENUS E-503

VENUS E-503-CHC & VENUS E-501-CHC Safety Goggle

Style

- 4 indirect ventilation ports for enhanced splash protection (5-503 to prevent fogging 15-503)
- Direct ventilation to allow cool air from the room & prevent fogging [E-501]
- Frame produced from PVC material for chemical resistance
- Over the glass compatibility
- Small compact, lightweight goggle
- Quality mark for assured performance

Head band

- Textile headband for user comfort
- Size adjustment available

Lens

- Hard coated lens designed to be abrasion resistant & provide good visibility
- Impact & UV protection



VENUS 6-501

Product	Item	Colour	Packing	Type
VENUS.909	11003	CLEAR	Pack of 15	CHC
VENUS-E-SM1	11002	CLEAR	Pack of 15	CHC
VENUS&-900	11079	CLEAR	Pack of 15	CHC-AF
VENUS-1-S81	11078	CLEAR	Pack of 15	CHC-AF

APPLICATION EXAMPLES

Furnace operation
Chemical industry
Laboratory
Mining
Paints
Pharmaceuticals
Ships

Poring cast dipping
Chemical handling chemical reaction
Liquids, acid and chemical handling , Degreasing, Plating
Drilling Material Handling
Paint Spray Mixing
Bulk Drugs Materials handling
Tank cleaning



HEARING PROTECTION



SAFETYNESTS



HEARING PROTECTION

Hearing Protection (NPD) - UNIVERSAL & ACE SERIES

VENUS | 10

REUSABLE & DISPOSABLE EAR PLUGES

Quality mark for assurance of product performance

CE₀₁₉₄
EN 352-1

ANSI S3:19.1974



VENUS N-303
NRR 27 dB | Reusable




VENUS N-101
NRR 32 dB | Disposable

Ordering Information

Item #	Description	Colour	Cord	Packing
150616401	Venus N-303	ORANGE	Zebra Textile - Container	100 Pcs/pack
150616201	Venus N-101	ORANGE	Uncorded	200 Pcs/pack

Identify the environment

Standard Decibel levels

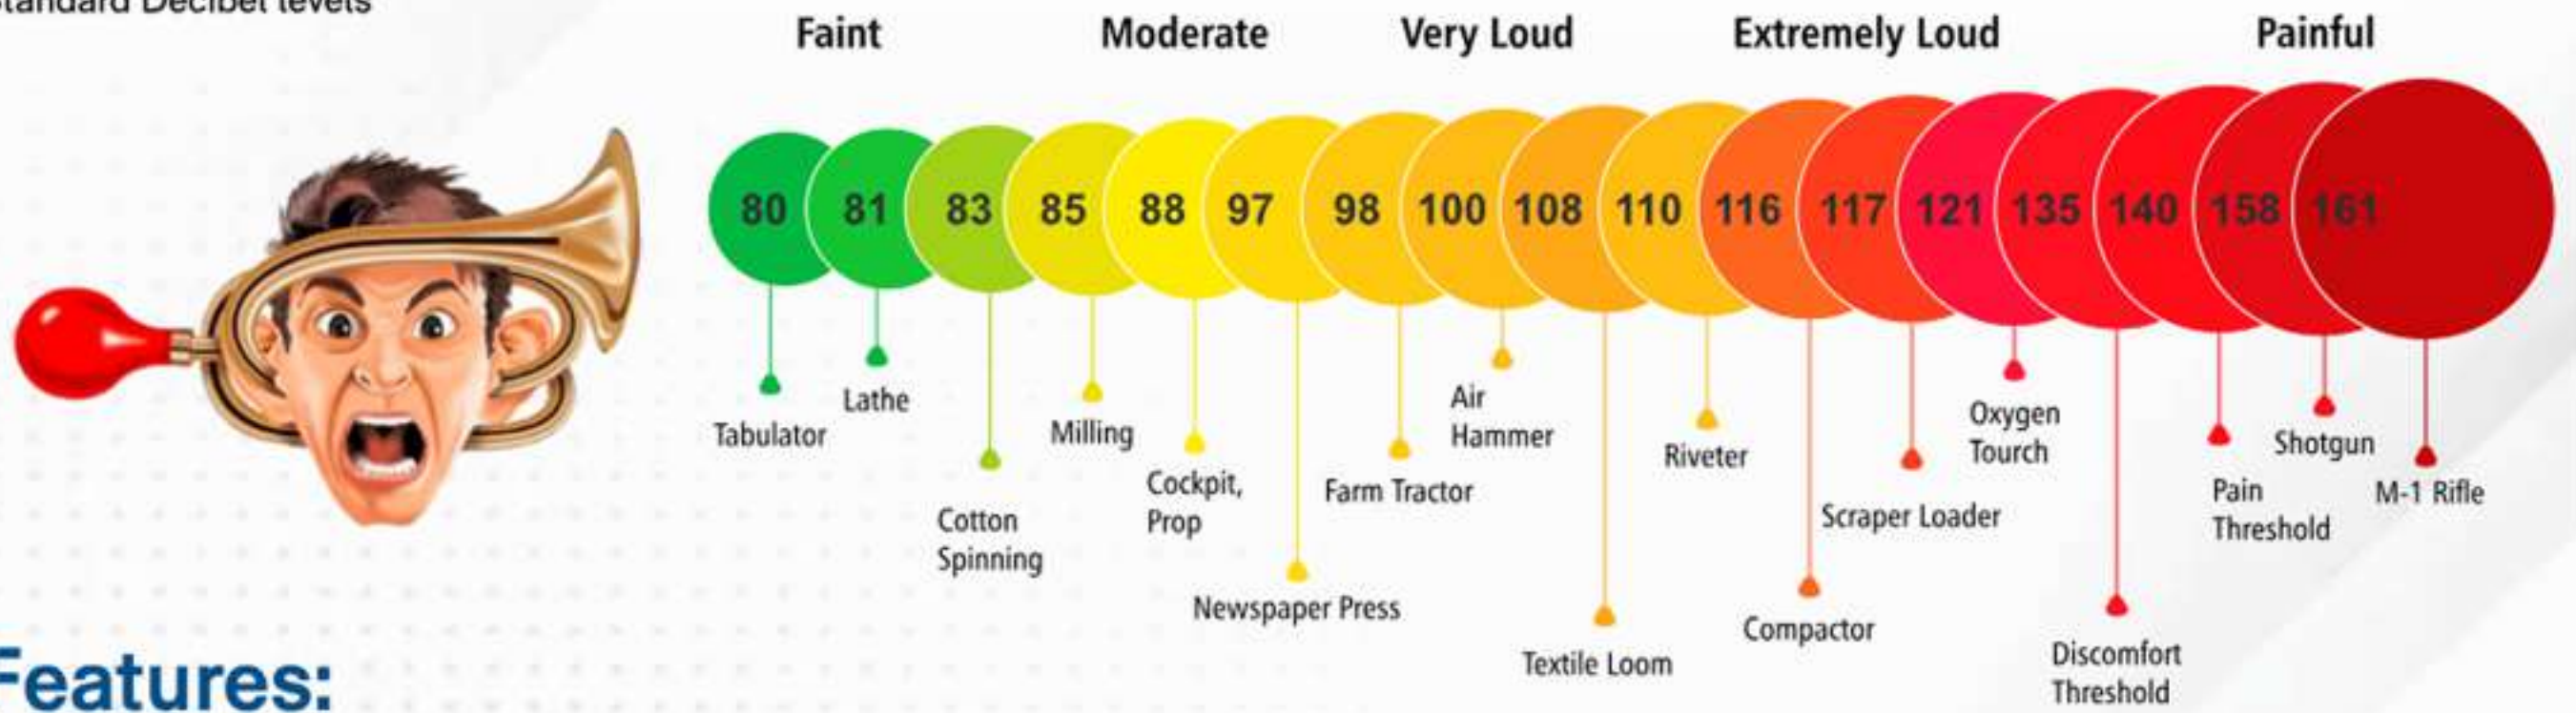

Features:



Washable TPE material
Easy to wash and re-use without compromising on hygiene
Environment friendly



Pharma variant with PVC cord
Easily detectable by metal detector



High Attenuation
Slow expansion to perfectly fit the ear canal size & form
Minimizes noise disturbance immediately



Soft Polyurethane foam
Ultimate comfort fit allows easy use for long duration without discomfort
wearer friendly optimum recovery



Textile cord
Reduces transmission of sound
Skin friendly



HEARING PROTECTION

Ref. 6MX300

Earcups



30dB

301g

0% METAL

The +

Hearing protection
- Good combination of high protection level and lightness

Comfort
- Comfortable PVC cushions with leather touch sensation

Recommended in electric environment (Metal free)
Compatible with all coverguard helmets (Albatros, Goeland, Classic, ...)

PURCHASE PACKAGING

Ref.	Size	Sachet	Carton
6MX3000NSI	-		20

SALES PACKAGING

Hangable individual pack

TECHNICAL FEATURES

Color	Black
Color 2	Fluorescent yellow
Weight	301g
SNR	30dB
H	34
L	21
M	27
Cups	ABS
Cushions	PVC with leather touch
Main risk	Prevention of intensive noises
dB	30dB

Earcups MAX300. Dual color black and yellow ABS cups, soft PVC cushions leather touch, nylon adapter with POM adjustable arm

SECTORS

- Farming, silviculture and fishing
- Extracting Oil and Gas
- Heavy & process industries (steel, metallurgy, paper, concrete, plaster...)
- Energy (production and distribution)
- Regional/public authorities
- Infrastructure, building industry

APPLICATIONS

Construction site, Production workshop

STANDARD(S)

This equipment conforms to the personal protective equipment model covered by the EC type-examination certificate 2777/13327-01/E08-01

Delivered by SATRA Technology Europe Ltd (2777) Bracetown Business Park- Clonee- Dublin 15 Dublin Ireland



EPI CAT. III

EN352-1:2002

EN352-3:2002

Helmet mounted earmuffs

coverguard



HEARING PROTECTION

Earmuffs

Ref. 6MX340



34dB 261g

The +

High hearing protection (34dB)
Very good combination of high protection and lightness
Adjustable and comfortable headband

PVC comfortable cushions with soft fabric sensation

PURCHASE PACKAGING

Référence	Taille	Sachet	Carton
6MX3400NSI			20

SALES PACKAGING



Hangable individual pack

DESCRIPTION

Earmuff MAX 340. Dual color black and yellow ABS cups, SS wire padded headband with fabric sensation, soft PVC cushions leather touch,

SECTORS

- Mechanicals constructions
- Light Industries
- Regional/public authorities
- Maintenance
- Infrastructure, building industry
- Transport (excluding manufacturing) and logistics

APPLICATIONS

Construction site, Production workshop

TECHNICAL FEATURES

Color	Black
Color 2	Fluorescent yellow
Weight	261g
SNR	34dB
H	38
L	24
M	31
Main risk	The earmuff helps reduce exposure to hazardous noise and other loud sounds.
dB	34dB

STANDARD(S)

This equipment conforms to the personal protective equipment model covered by the EC type-examination certificate 2777/13335-03/E01-01

Delivered by SATRA Technology Europe Ltd (2777) Bracetown Business Park- Clonee- Dublin 15 Dublin Ireland



EPI CAT. III

EN352-1:2002

Earmuffs

coverguard



RESPIRATORY PROTECTION



Multilingual User instructions
For easy acceptance by
different wearers



SAFETYNESTS



RESPIRATORY PROTECTION

High protection & Best comfort.

- Full foam seal for leak-proof comfortable fit
- Adjustable nose clip to provides leak-proof fit
- Variety of strap types and attachments
- *Available with Carbon filter mask for nuisance level organic vapor relief.

• Disposable Respirators (FFR) - PREMIUM SERIES



VENUS RPD914P100 - TC-84A-7887

Convex Mesh - Large filter style
 Protection: Oil based particles
 M.U.L: Upto 30 x OEL
 Net reinforced shell | Full foam seal



VENUS V-2735 SLOV-V*

Convex - Large filter style
 Protection: Solid Dust / Oil Mist / Nuisance level of odour
 M.U.L: Upto 30 x OEL
 Activated Carbon layer | Flame retardant outer layer

***Note:**

This respirator offers nuisance level relief from organic vapor / acid gas that are below OEL. Nuisance level refers to concentrations not exceeding OEL.

Ordering Information

Item #	Description	Colour	Elastic	Packing
150264701	Venus RPD914P100 Class: P100 - Valved.	WHITE	WELDED	5 Pcs/pack
150265601	Venus V-2735 SLOV-V Class: FFP3 NR D - Valved.	GREY	WELDED	5 Pcs/pack

APPLICATION EXAMPLES

Chemical Material handling, Material processing
Automobile Painting, Powder coating, Welding, Maintenance work
Battery Lead handling
Pharmaceuticals Bulk drugs, Material handling
Ceramics Material mixing

Metal Fabrication Soldering, Welding, Metal pouring, Smelting
Agriculture Pesticides, Insecticide spraying
Engineering Welding, Sand blasting, Buffing, Powder coating, Painting, Cutting
Effluent Treatment Plant Maintenance



RESPIRATORY PROTECTION



Reusable Half & Full Face Mask with Dual filters

CE 0121
EN 140:1998
Half Face Mask

CE 0121
EN 143
Particle Filter

CE 0121
EN 14387
Gas Filter



Reusable Respirators

(HFM/FFM) - PREMIUM, ACE & UNIVERSAL SERIES



*Available in



*Available in Venus V-7900 Dual Gas filters



Venus V-7900 A1



Venus V-7900 FHP P3



Venus V-7900 MGC P100

S
M
L
Colour

VENUS V-900 HFM - Silicon / TPE

Compatible with Venus V-7900 dual gas filters

Ordering Information

Item #	Description	Colour	Packing
150536901	Venus V-900 TPE - S	GREY	1 Pcs/pack
150536801	Venus V-900 TPE - M	GREY	1 Pcs/pack
150537501	Venus V-900 Silicon - M	GREY	1 Pcs/pack

Item #	Description	Packing
150723001	Venus V-7900 A1	2 Pair/box
150737101	Venus V-7900 FHP P3	2 Pair/box
 110530101	Venus V-900 Silicon + V-7900 MGC P100 COMBO - TC-84A-9657	1 Pair/box

Features:



Drop down
Easy to put on and remove while use



Head cradle
Lock down mechanism provides optimum fit & good comfort



Stay cool butterfly vent valve
Provides breathing comfort and promotes easy communication Effectively removes heat build-up



Light weight body
Made from soft touch material, skin friendly
Low maintenance
minimum hindrance in working



Twist & Click Fit cartridge
Easy to fit and replace

RESPIRATORY PROTECTION

Disposable Respirators (FFR) - ACE SERIES



VENUS V-4400 N95 - TC-84A-8126

Flat fold style
Protection: Non oil based particles



VENUS V-4400 SN95 - TC-84A-9378

Flat fold style
Protection: Non oil based particles
Note: Fluid resistance conforms to ASTM F1862 at 120mmHg.



VENUS V-4200 N95 - TC-84A-8112

Flat fold - Large filter style
Protection: Non oil based particles
Exhalation vent valve



VENUS CN95 OV - TC-84A-5632


Convex cup seam style
Protection: Non oil based particles &
Nuisance level of Odour Activated Carbon layer

***Note:** This respirator offers nuisance level relief from organic vapor / acid gas that are below OEL. Nuisance level refers to concentrations not exceeding OEL.

Features:



Flat fold mask
Stylish universal design which gives better visibility to user
Easy to pocket store when not in use

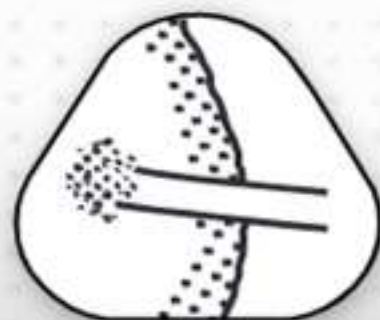

Welded head strap
Provides leakproof and optimum comfort



Stay cool butterfly vent valve
Provides breathing comfort and promotes easy communication
Effectively removes heat build-up
Transparent vent valve



Elastic Sewn outside filter area
Sewn head strap provides better pull strength



Superior technology micro-fine filter media
Made from special engineered fabrics which are extremely easy to breathe but also provide higher protection up to 0.3 micron



RESPIRATORY PROTECTION



VENUS RPD513N95 - TC-84A-7872

Convex double shell style
Protection: Non oil based particles
Nose liner



VENUS RPD514N95 - TC-84A-7873

Convex double shell style
Protection: Non oil based particles
Nose liner

Ordering Information

Item #	Description	Colour	Elastic	Packing
150407501	Venus V-4400 N95 Class: N95 - Unvalved.	WHITE	WELDED	25 Pcs/pack
150405001	Venus V-4400 SN95 Class: Surgical N95 - Unvalved.	WHITE	WELDED	25 Pcs/pack
150407401	Venus V-4200 N95 Class: N95 - Valved.	WHITE	RUBBER WELDED	10 Pcs/pack
150265501	Venus CN95OV Class: N95 - Unvalved.	GREY	SEWN	15 Pcs/pack
150264501	Venus RPD513N95 Class: N95 - Unvalved.	WHITE	WELDED	20 Pcs/pack
150264401	Venus RPD514N95 Class: N95 - Unvalved.	WHITE	WELDED	10 Pcs/pack

Composite multilayer media

Pre-filter coarse dust

- Does not clog the filter
- High dust holding capacity
- Can be used over longer period of time

Outer filter media


- Sheds minimum lint
- Application friendly

Soft Inner layer

- Comfort to the wearer
- Skin friendly even when perspiring

Superior technology Micro fine filter media

- Protects from respirable suspended particulate matter
- Composite of multiple layers pre-filter, fine filter and skin comfort layer

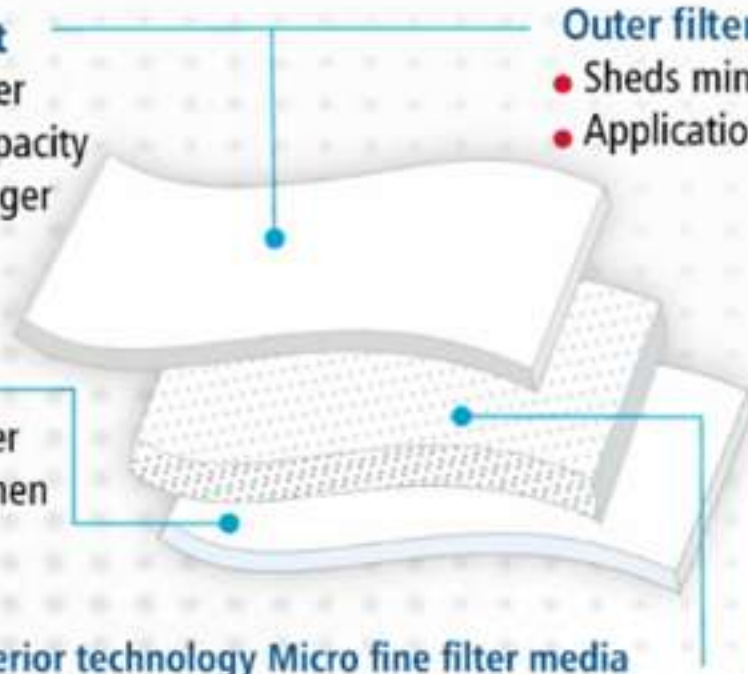

StayCool Butterfly Vent Valve



Effectively removes CO₂ & heat build-up



Promotes easy communication



Provides breathing comfort



PERSONAL PROTECTION



SAFETYNESTS



SAFETY NEST INDIA PRIVATE LTD.

Secure Your Workplace with Safety Nest

INDUSTRIAL SAFETY COVERALL

The Industrial Safety Coverall made by Pre-shrunk, Mercerized, Sanforized Coffon fabric along with 50mm wide High Vis Retro Reflective Strip for protective safety and visibility in dark.



Technical Data:

Product Name: Safety Coverall

Brand Name: Safety Nest

Model No: SN32

Fabric: 100% Cotton, 20s x 20s

Mass: 200gsm+-5%

Colour: Navy Blue/Royal Blue/Light Blue/Beige/Red/Orange

Sizes: s to 5XL or as per customer requirement.



Design & Features:

- Front YKK Brass Colour zipper with fly-flap and snap button on top.
- Two gas monitor loops above the chest pockets.
- Two chest pockets with flap and Velcro closure.
- Two back pockets with flap and Velcro closure.
- Two side cross pockets bothside of below waist.
- One Tools pocket on right leg.
- One Cargo patch pocket on right leg.
- One Pen pocket on leftArm.
- Elastic on back side of waist.
- Cuff closure withsnap button.
- Five belt loops for waistbelt holder around waist.
- 50mmwide HighVis Retro Reflective Stripon Shoulders, Sleeves & Legs.



INDUSTRIAL SAFETY COVERALL



MODEL: MODAPRO IFR COVERALL

An IFR coverall, in the context of industrial safety, stands for "Inherently Flame-Resistant coverall."

IFR coveralls are typically made from specialized fabrics that have undergone rigorous testing to meet specific safety standards, such as NFPA 2112.

When wearing IFR coveralls, workers can reduce the risk of burns and other injuries in environments where flames or high temperatures are a concern. It is crucial to ensure that the coveralls fit properly and that all relevant safety guidelines are followed to maximize their protective capabilities.

We are always inventing & updating the products. We sell in order to meet the ever-changing needs of customers & the industry as a whole.



DESIGN & FEATURES:


- Single layer coverall made of Inherent flame resistance blend made of 50% Modacrylic, 38% Cotton, 10% Para Aramid & 2% Antistatic and 240 gsm.
- Two-way metal zipper with full sleeves cuff & metal snap closure.
- Two chest pockets with flap & one pen pocket on sleeves.
- Right leg a tool pocket.
- Two side pockets concealed access from the outside to the inside.
- Two back pockets with flap & Velcro.
- For high visibility, one-inch EN 471 certified FR silver reflective tape is applied across the shoulder, sleeves, and bottom.
- Elasticized waistband.
- Throughout the garment's manufacturing, FR thread is employed.
- All the accessories and thread used flame resistance.

APPLICATION:
REFINERIES

OIL GAS
INDUSTRIES

PETROCHEMICALS
UTILITIES

COLOURS :

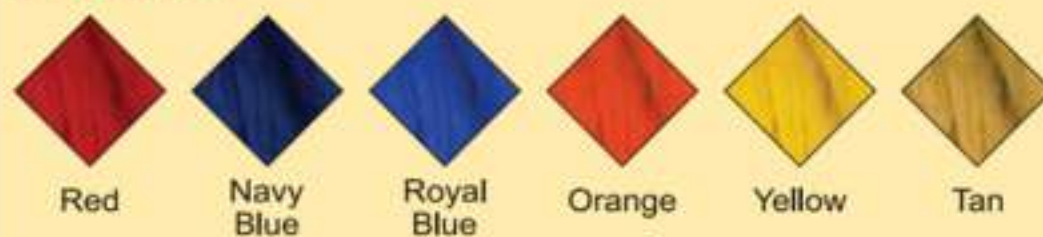

SIZE CHART :

S	M	L	XL	2XL	3XL	4XL	5XL	6XL
36-38	40-42	44-46	48-50	52-54	56-58	60-62	64-66	68-70

CUSTOMISED REQUIREMENT :

- Design, Colour and Sizes can be done as per Client's requirements.
- Computerized embroidered Logo, Badges etc.
- EN 471 High-Viz Reflective Tape.

COMPONENTS :



Two - way metal zipper with full sleeves cuff & metal snap closure.



Action back allowing maximum body movement.



Elasticized waistband.





FR 230GSM REFLECTIVE COVERALL (SHAHEEN)



www.safetynests.com



Fabric Specification

- **Weight:** 230GSM,
- **Weave:** 2/1S Twill **Specialty:** Proban Fire Retardant

Care Instructions

- 🧺 Maximum washing temperature 60°C normal process
- ⊗ Do not bleach
- Ⓟ Professional dry cleaning
- 🔪 Iron at a maximum sole-plate temperature of 150°C
- 🌀 Do not tumble dry.

Product Features

- Ultimate protection against Flame & ARC Flash Hazards
- Breathable, Soft to wear & Fantastic to Touch
- Superior colorfastness
- 3% washing shrinkage
- FR Properties lasts lifetime of the fabric
- Additional tool pockets at sleeves & bottom side seams
- Elasticated waist for close fitting
- 5cm Reflective Tape with 330cd/lx.m2 reflection value
- Additional Adjustment for fitting at cuff/Extra side pockets with Snap buttons
- Double Slider zipper at front chest opening for easy to wear
- Bartack at all stress points

COLORS

 LIGHT ROYAL BLUE
  NAVY DANGREE

STANDARDS



SIZE RANGE (CM)

SIZE	WAIST	INSEAM	LENGTH (HPS-BTM)
S	59.00	67.00	149.50
M	61.00	69.00	153.50
L	63.00	71.00	157.50
XL	65.00	73.00	163.50
2XL	67.00	75.00	165.50
3XL	69.00	77.00	169.50
4XL	71.00	79.00	173.50
5XL	73.00	81.00	177.50
6XL	75.00	83.00	181.50



FR SAFE EXPRESS COVERALL (BOLAN)

CATEGORY CAT 2 & ATPV
RATING 8.7 CAL



SARENA
TEXTILE INDUSTRIES

Fabric Specification

- Weight: 250GSM,
- Weave: 3/1S Twill Specialty: Proban Fire Retardant

Care Instructions

- 🧺 Maximum washing temperature 60°C normal process
- ⊗ Do not bleach
- Ⓟ Professional dry cleaning
- 🔪 Iron at a maximum sole-plate temperature of 150°C
- 🌀 Do not tumble dry.


Product Features

- Ultimate protection against Flame & ARC Flash Hazards
- Breathable, Soft to wear & Fantastic to Touch
- Superior colorfastness
- 3% washing shrinkage
- FR Properties lasts lifetime of the fabric
- Additional tool pockets at sleeves & bottom side seams
- Elasticated waist for close fitting
- Double 2.5cm Reflective Tape with 330cd/lx.m2 reflection value
- Additional Adjustment for fitting at cuff/Extra side pockets with snap buttons
- Chest pockets with flaps and snap buttons for secure storage
- Double Slider zipper at front chest opening for easy to wear
- Bartack at all stress points

COLORS

- NAVY BLUE - ROYAL BLUE
- RED - ORANGE - GREY
- KHAKI - YELLOW
- LIGHT ROYAL BLUE

STANDARDS

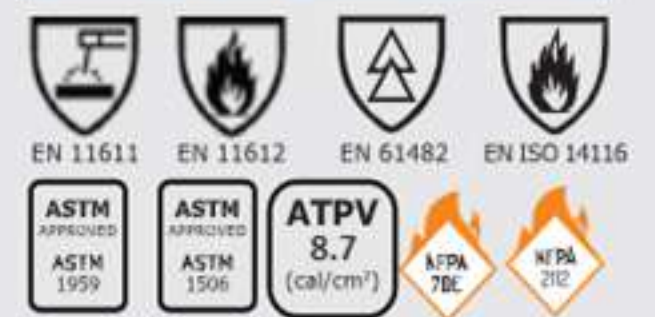

PROBAN

SIZE RANGE (CM)

SIZE	WAIST	INSEAM	LENGTH (HPS-BTM)
S	59.00	67.00	149.50
M	61.00	69.00	153.50
L	63.00	71.00	157.50
XL	65.00	73.00	163.50
2XL	67.00	75.00	165.50
3XL	69.00	77.00	169.50
4XL	71.00	79.00	173.50
5XL	73.00	81.00	177.50
6XL	75.00	83.00	181.50
7XL	77.00	85.00	185.50
8XL	79.00	87.00	189.50
9XL	81.00	89.00	193.50



FR K2 WELDING COVERALL

CATEGORY CAT 2
& ATPV RATING 13 CAL



SARENA
TEXTILE INDUSTRIES

Fabric Specification

- **Weight:** 350GSM,
- **Weave:** 3/1S Twill **Specialty:** Proban Fire Retardant

Care Instructions

- 🧺 Maximum washing temperature 60°C normal process
- ⊗ Do not bleach
- Ⓟ Professional dry cleaning
- 🔪 Iron at a maximum sole-plate temperature of 150°C
- ⊗ Do not tumble dry.

Product Features

- Ultimate protection against Flame & ARC Flash Hazards
- Breathable, Soft to wear & Fantastic to Touch
- Particular for welding job
- Superior colorfastness
- 3% washing shrinkage
- FR Properties lasts lifetime of the fabric
- Additional tool pockets at sleeves & bottom side seams
- Elasticated waist for close fitting
- Double 2.5cm Reflective Tape with 330cd/lx.m2 reflection value
- Additional Adjustment for fitting at cuff/Extra side pockets with Snap buttons
- Chest pockets with flaps and snap buttons for secure storage
- Double Slider zipper at front chest opening for easy to wear
- Bartack at all stress points

COLORS

NAVY BLUE

STANDARDS



SIZE RANGE (CM)

SIZE	WAIST	INSEAM	LENGTH (HPS-BTM)
S	59.00	67.00	146.00
M	61.00	69.00	150.00
L	63.00	71.00	154.00
XL	65.00	73.00	158.00
2XL	67.00	75.00	162.00
3XL	69.00	77.00	166.00
4XL	71.00	79.00	170.00
5XL	73.00	81.00	174.00
6XL	75.00	83.00	178.00



NON-FR 220 GSM REFLECTIVE COVERALL



Fabric Specification

- Weight: 220GSM,
- Weave: 2/1S Twill

Care Instructions

- 🧺 Maximum washing temperature 60°C normal process
- ⊗ Do not bleach
- Ⓟ Professional dry cleaning
- ⊗ Do not tumble dry.

Product Features

- Breathable, Soft to wear & Fantastic to Touch
- Superior colorfastness
- 3% washing shrinkage
- Properties lasts lifetime of the fabric
- Additional tool pockets at sleeves & bottom side seams
- Elasticated waist for close fitting
- 5cm Reflective Tape with 330cd/lx.m2 reflection value
- Additional Adjustment for fitting at cuff.
- Double Slider zipper at front chest opening for easy to wear
- Bartack at all stress points

SARENA
TEXTILE INDUSTRIES

COLORS



SIZE RANGE (CM)

SIZE	WAIST	INSEAM	LENGTH (HPS-BTM)
S	57.00	65.00	142.00
M	59.00	67.00	146.00
L	61.00	69.00	150.00
XL	63.00	71.00	154.00
2XL	65.00	73.00	158.00
3XL	67.00	75.00	162.00
4XL	69.00	77.00	166.00
5XL	71.00	79.00	170.00



NON-FR 220 GSM TOUCH STONE COVERALL W/ REFLECTIVE (100% COTTON)



SARENA
TEXTILE INDUSTRIES

Fabric Specification

- Weight: 220GSM,
- Weave: 2/1S Twill

Care Instructions

- 🧺 Maximum washing temperature 60°C normal process
- ⊗ Do not bleach
- Ⓟ Professional dry cleaning
- ⊗ Do not tumble dry.

Product Features

- Breathable, Soft to wear & Fantastic to Touch
- Superior colorfastness
- 3% washing shrinkage
- Properties lasts lifetime of the fabric
- Additional tool pockets at sleeves & bottom side seams
- Elasticated waist for close fitting
- 5cm Reflective Tape with 330cd/lx.m2 reflection value
- Additional Adjustment for fitting at cuff.
- Double Slider zipper at front chest opening for easy to wear
- Bartack at all stress points

COLORS

LIGHT ROYAL BLUE 

SIZE RANGE (CM)

SIZE	WAIST	INSEAM	LENGTH (HPS-BTM)
S	57.00	65.00	142.00
M	59.00	67.00	146.00
L	61.00	69.00	150.00
XL	63.00	71.00	154.00
2XL	65.00	73.00	158.00
3XL	67.00	75.00	162.00
4XL	69.00	77.00	166.00
5XL	71.00	79.00	170.00



NON-FR REFLECTIVE PANTS & SHIRT



Fabric Specification

- Weight: 220GSM,
- Weave: 2/1S Twill

Care Instructions

- 🧺 Maximum washing temperature 60°C normal process
- ⊗ Do not bleach
- Ⓟ Professional dry cleaning
- ⊗ Do not tumble dry.

Product Features

- Breathable, Soft to wear & Fantastic to Touch
- Superior colorfastness
- 3% washing shrinkage
- Properties lasts lifetime of the fabric
- Additional tool pockets at sleeves & bottom side seams
- Elasticated waist for close fitting
- 5cm Reflective Tape with 330cd/lx.m2 reflection value
- Additional Adjustment for fitting at cuff.
- Bartack at all stress points

COLORS

ROYAL BLUE - NAVY BLUE

SIZE RANGE (CM)

SIZE	WAIST	INSEAM	LENGTH (HPS-BTM)
S	57.00	65.00	142.00
M	59.00	67.00	146.00
L	61.00	69.00	150.00
XL	63.00	71.00	154.00
2XL	65.00	73.00	158.00
3XL	67.00	75.00	162.00
4XL	69.00	77.00	166.00
5XL	71.00	79.00	170.00



FR 230GSM- 2 PC COVERALL (SHAHEEN)



Fabric Specification

- Weight: 230GSM,
- Weave: 2/1S Twill Specialty: Proban Fire Retardant

Care Instructions

- 🧺 Maximum washing temperature 60°C normal process
- ⊗ Do not bleach
- Ⓟ Professional dry cleaning
- ⊗ Do not tumble dry.

Product Features

- Breathable, Soft to wear & Fantastic to Touch
- Superior colorfastness
- 3% washing shrinkage
- Properties lasts lifetime of the fabric
- Additional tool pockets at sleeves & bottom side seams
- Elasticated waist for close fitting
- 5cm Reflective Tape with 330cd/lx.m2 reflection value
- Additional Adjustment for fitting at cuff.
- Bartack at all stress points

COLORS

NAVY DANGREE

EN STANDARDS



SIZE RANGE (CM)

SIZE	PANT		SHIRT	
	WAIST (HALF)	INSEAM	WAIST (HALF)	INSEAM
S	43.00	42.00	43.00	42.00
M	45.00	43.00	45.00	43.00
L	47.00	44.00	47.00	44.00
XL	49.00	45.00	49.00	45.00
2XL	51.00	46.00	51.00	46.00
3XL	53.00	47.00	53.00	47.00
4XL	55.00	48.00	55.00	48.00
5XL	57.00	49.00	57.00	49.00
6XL	59.00	50.00	59.00	50.00
7XL	61.00	51.00	61.00	51.00
8XL	63.00	52.00	63.00	52.00
9XL	65.00	53.00	65.00	53.00
10XL	67.00	54.00	67.00	54.00



INHERENT/FLAME RETARDANT COVERALL (ROCK COVERALL)

CATEGORY CAT 1
& ATPV RATING 4.1 CAL



SARENA
TEXTILE INDUSTRIES

Fabric Specification

- **Weight:** 150GSM,
- **Weave:** 1/1 Twill **Specialty:** Inherent Fire Retardant(IFR) & Antistatic Finish

Care Instructions

- 🧺 Maximum washing temperature 60°C normal process
- ⊗ Do not bleach
- Ⓟ Professional dry cleaning
- 🧊 Iron at a maximum sole-plate temperature of 150°C
- ⊗ Do not tumble dry.

Product Features

- Ultimate protection against Flame & ARC Flash Hazards
- Breathable, Soft to wear & Fantastic to Touch
- Excellent colorfastness. 3% washing shrinkage
- Inherent FR Properties lasts lifetime of the fabric
- Additional tool pockets at sleeves & bottom side seams
- Elasticated waist for close fitting
- FR reflective tape 2.5CM with Minimum 330cd/lx.m2 reflection value
- Flexible adjustments at cuff with Snap Buttons
- Chest Pockets with flaps & Snap buttons for Secure Storage
- Permanent sewn crease line at front Panel
- Back pockets(One is with Flap & snap button)
- FR Sewing thread & Snap Button
- FR Double slider Metal Zipper at front Chest opening for easy to wear
- Bartack at all stress points

COLORS

LIGHT ROYAL BLUE

STANDARDS



SIZE RANGE (CM)

SIZE	WAIST	INSEAM	LENGTH (HPS-BTM)
S	59.00	67.00	149.50
M	61.00	69.00	153.50
L	63.00	71.00	157.50
XL	65.00	73.00	163.50
2XL	67.00	75.00	165.50
3XL	69.00	77.00	169.50
4XL	71.00	79.00	173.50
5XL	73.00	81.00	177.50
6XL	75.00	83.00	181.50
7XL	77.00	85.00	185.50
8XL	79.00	87.00	189.50
9XL	81.00	89.00	193.50



COVERALL

COLD WEATHER

BEAVER

MO57620



BENEFITS

- THERMAL: increased cold resistance + hood
- VISIBILITY: reflective tape



coverguard®

FABRICS

- OUTER: 60% Cotton / 40% Waterproof polyester - 245g/m²
- QUILTED TAFFETA LINING: 100% Polyester - 200g/m²
- FUR: 100% Polyester (hood)

FEATURES

- Fixed elastic drawcord hood
- Central zip
- Elasticated waist
- Windproof cuffs
- 2 lower Italian pockets
- 2 chest pockets with flap closed by snap
- 1 chest phone pocket
- 1 inside pocket with flap
- Zip on calves
- Quilted body
- Reflective strip on right calf

TAILLES SIZES	S	M	L	XL	2XL	3XL
BLEU BLUE	57619	57620	57621	57622	57623	57624
CONDITIONNEMENT PACKAGING	Individual pack or per 5					



0,331m²K/W
2
x
EN 342



Body protection

DT115

CHEMICAL PROTECTION OVERALLS

Type 5 disposable, anti-static, dry particle resistant chemical protective coveralls with enhanced breathability



Applications

- Agriculture
- Public Works
- Building
- Finishing Works/Craftsmanship
- Law Enforcement
- Maintenance

Certifications and norms



EN1149-5



EN ISO 13982-1
TYPE 5



EN13034
TYPE 6

Risk Protection



Antistatic



Chemical



Particulates

Technical details

Gender	Unisex
Size range	M → 2XL
Workwear color	White, Blue
Hood type	Fixed hood
Fastening	Zipper, Flap, and Hook and Loop Closure
Marking type	Transfer printing
Waterproof zipper	yes





SAFETY VESTS (FR & NON-FR TWILLS)

CATEGORY CAT 1&2
& ATPV RATING
8CAL-13CAL



SARENA
TEXTILE INDUSTRIES

Fabric Specification

- **Weight:** 200GSM-270gsm,
- **Weave:** 2/1 & 3/1S Twill, **Speciality:** Proban Fire Retardant


Care Instructions

- 🧺 Maximum washing temperature 60°C normal process
- ⊗ Do not bleach
- Ⓜ Professional dry cleaning
- 🧊 Iron at a maximum sole-plate temperature of 150°C
- ⊗ Do not tumble dry.

Product Features

- Ultimate protection against Flame & ARC Flash Hazards
- Excellent performance with durability
- Breathable, Soft to wear & Fantastic to Touch
- Superior colorfastness
- 3% washing shrinkage
- FR Properties lasts lifetime of the fabric
- Cover cloths from stains
- 5cm Reflective Tape with 330cd/lx.m2 reflection value
- Zipper at front – High quality of Vislon

COLORS



STANDARDS



SIZE RANGE (CM)

SIZE	CHEST	LENGTH HPS-BTM
S	58.00	65.00
M	60.00	67.00
L	62.00	68.00
XL	64.00	69.00
2XL	66.00	70.00
3XL	68.00	71.00
4XL	70.00	72.00
5XL	72.00	73.00



SAFETY VEST




Make	Vasa		Image 
Design	Front velcro open reflective jacket in two vertical two horizontal form		
Fabric	Background fabric 130 Gsm 100% polyester plain type fabric in Fluorescent green color		
Reflective	2" Glass bead reflective material DM 1002 certified tape		
Accessories	NA		
Logo	NA		



SAFETYNESTS



SAFETYNESTS

Make	Vasa		Image 
Design	Front zipper open reflective jacket in two vertical two horizontal form		
Fabric	Background fabric 130 Gsm 100% polyester plain type fabric in Fluorescent green color		
Reflective	2" Glass bead reflective material DM 1002 certified tape		
Accessories	Front left flap pocket with pen pocket & D ring, right side ID pocket, down two box type pockets		
Logo	NA		



FR WINTER JACKET w/HOODY (ROCCO/ALASKA 270)

CATEGORY CAT 2
& ATPV RATING 10 CAL



Fabric Specification

- **Weight:** 270GSM,
- **Weave:** 3/1S Twill **Specialty:** Proban Fire Retardant

Care Instructions

- 🧺 Maximum washing temperature 60°C normal process
- ⊗ Do not bleach
- Ⓟ Professional dry cleaning
- 🧊 Iron at a maximum sole-plate temperature of 150°C
- 🌀 Do not tumble dry.

Product Features

- Ultimate protection against Flame & ARC Flash Hazards
- Excellent performance with durability
- Breathable, Soft to wear & Fantastic to Touch
- Superior colorfastness
- 3% washing shrinkage
- FR Properties lasts lifetime of the fabric
- Quilting inside to warm the body
- 2.5cm FR Reflective Tape At shoulder & Arms
- High quality Vislon Zipper at front
- Zip at Back Neck for Hood
- Two Front side pockets

COLORS

DARK NAVY

STANDARDS



SIZE RANGE (CM)

SIZE	CHEST	LENGTH HPS-BTM
S	62.00	70.00
M	64.00	72.00
L	66.00	74.00
XL	68.00	76.00
2XL	70.00	78.00
3XL	72.00	80.00
4XL	74.00	82.00
5XL	76.00	84.00



FR WINTER JACKET (ALASKA)

CATEGORY CAT 2
& ATPV RATING 8 CAL



Fabric Specification

- Weight: 250GSM,
- Weave: 3/1S Twill Specialty: Proban Fire Retardant

Care Instructions

- 🧺 Maximum washing temperature 60°C normal process
- ⊗ Do not bleach
- Ⓟ Professional dry cleaning
- 🔧 Iron at a maximum sole-plate temperature of 150°C
- ⊗ Do not tumble dry.

Product Features

- Ultimate protection against Flame & ARC Flash Hazards
- Excellent performance with durability
- Breathable, Soft to wear & Fantastic to Touch
- Superior colorfastness
- 3% washing shrinkage
- FR Properties lasts lifetime of the fabric
- Quilting inside to warm the body
- 2.5cm FR Reflective Tape At shoulder & Arms
- High quality Vislon Zipper at front
- Front Pockets with Flap
- Two Front side pockets

COLORS

ROYAL BLUE - DARK NAVY

STANDARDS



SIZE RANGE (CM)

SIZE	CHEST	LENGTH HPS-BTM
S	62.00	70.00
M	64.00	72.00
L	66.00	74.00
XL	68.00	76.00
2XL	70.00	78.00
3XL	72.00	80.00
4XL	74.00	82.00
5XL	76.00	84.00



NON FR WINTER JACKET

(PC 65:35)



SARENA
TEXTILE INDUSTRIES

Fabric Specification

- Weight: 250GSM,
- Weave: 3/1S Twill

Care Instructions

- 🧺 Maximum washing temperature 60°C normal process
- ⊗ Do not bleach
- Ⓜ Professional dry cleaning
- ⊗ Do not tumble dry.

Product Features

- Excellent performance with durability
- Breathable, Soft to wear & Fantastic to Touch
- Superior colorfastness
- 3% washing shrinkage
- FR Properties lasts lifetime of the fabric
- Quilting inside to warm the body
- Reflective tape binding at front
- High quality Vislon Zipper at front
- Two Front side pockets

COLORS

DARK NAVY

SIZE RANGE (CM)

SIZE	CHEST	LENGTH HPS-BTM
S	62.00	70.00
M	64.00	72.00
L	66.00	74.00
XL	68.00	76.00
2XL	70.00	78.00
3XL	72.00	80.00
4XL	74.00	82.00
5XL	76.00	84.00



WINTER JACKET



Ref. **5SOB010**

Jacket



The +

A basic
Raglan sleeves
Woman's version: SHIKIMI

PURCHASE PACKAGING

Référence	Taille	Carton
5SOB01000L	L	10
5SOB01000M	M	10
5SOB01000S	S	10
5SOB0100XL	XL	10
5SOB0102XL	XXL	10
5SOB0103XL	XXXL	10
5SOB0104XL	XXXXL	10

SALES PACKAGING



Individual pack

SECTORS

- Regional/public authorities
- Infrastructure, building industry
- Construction - finishing work
- Transport (excluding manufacturing) and logistics



FABRICS

Color Black
Material 3-layer SOFTSHELL (solid): 94% Polyester/ 6% Elastane + TPU membrane + 100% Polyester microfleece. 290g/m²

Material 2 3-layer SOFTSHELL (mottled): 94% Polyester/ 6% Elastane + TPU membrane + 100% Polyester microfleece. 310g/m²
Waterproofness 2 000mm
Breathability 600 g/m²/24h

TECHNICAL FEATURES

Collar High collar
Closing Central zip+ Chin guard
Sleeves Raglan sleeves
Cuffs Cuffs with elasticated bias

Pockets 1 zipped left chest pocket/2 lower zipped pockets in the seam



WINTER JACKET



Ref. **5SOB120**

Jacket



The +

A basic
Raglan sleeves
Woman's version: SHIKIMI

PURCHASE PACKAGING

Référence	Taille	Carton
5SOB12000L	L	10
5SOB12000M	M	10
5SOB12000S	S	10
5SOB1200XL	XL	10
5SOB1202XL	XXL	10
5SOB1203XL	XXXL	10
5SOB1204XL	XXXXL	10

SALES PACKAGING



Individual pack

SECTORS

- Regional/public authorities
- Infrastructure, building industry
- Construction - finishing work
- Transport (excluding manufacturing) and logistics

FABRICS

Color Navy blue
Material 3-layer SOFTSHELL (solid): 94% Polyester/ 6% Elastane + TPU membrane + 100% Polyester microfleece. 290g/m²

Material 2 3-layer SOFTSHELL (mottled): 94% Polyester/ 6% Elastane + TPU membrane + 100% Polyester microfleece. 310g/m²
Waterproofness 2 000mm
Breathability 600 g/m²/24h

TECHNICAL FEATURES

Collar High collar
Closing Central zip+ Chin guard
Sleeves Raglan sleeves
Cuffs Cuffs with elasticated bias

Pockets 1 zipped left chest pocket/2 lower zipped pockets in the seam





WINTER JACKET



Parka



Ref. **5PDA120**



coverguard



THE +

A basic must-have
Keeps the warmth in

PURCHASE PACKAGING

Ref.	Size	Carton
5PDA12000L	L	5
5PDA12000M	M	5
5PDA12000S	S	5
5PDA1200XL	XL	5
5PDA1202XL	2XL	5
5PDA1203XL	3XL	5
5PDA1204XL	4XL	5

SALES PACKAGING



Individual pack

See also

VARIANTS

5PDA01



FABRICS

Color	Navy blue
Color 2	Reflective grey
Material	OXFORD: 100% Polyester, Polyurethane coated - 250Dx200D
Main lining	PADDING: 100% polyester - 160g/m2 (body + sleeves) - 80g/m2 (collar)

TECHNICAL FEATURES

Hood	Fixed Oxford hood integrated into collar / Hood with elastic drawcord
Collar	Fleece lined stand-up collar
Closing	Central zip under flap with velcro
Cuffs	Adjustable cuffs by velcro
Pockets	1 chest pocket with zip under piping / 2 lower zipped pockets under piping / 1 zipped sleeve pocket / 1 inside patch pocket closed by velcro
Tightening	Adjustable hemline with elastic drawcord
Finishing details	Contrasting sleeve zip (black version)

Lining 2	TAFFETA LINING: 100% Polyester - 55g/m2
Lining 3	FLEECE LINING: 100% Polyester (collar)

Visibility	Contrasting sleeve zip (waterproof and reflective on navy version)
Marking access	Branding access

STANDARD(S)



EPI CAT. I

EN14058:2004

Garments for protection against cool environments

EN14058:2017

Garments for protection against cool environments



3.3.x.x



WINTER JACKET



Bomber

Bomber

coverguard

Ref. **5GOM450**



The +

- Robust & waterproof fabric
- Keep warm
- Raglan sleeves
- Modern look

PURCHASE PACKAGING

Référence	Taille	Carton
5GOM45000L	L	10
5GOM45000M	M	10
5GOM45000S	S	10
5GOM4500XL	XL	10
5GOM4502XL	XXL	10
5GOM4503XL	XXXL	10

SALES PACKAGING



Individual pack

SECTORS

- Regional/public authorities
- Infrastructure, building industry
- Construction - finishing work
- Transport (excluding manufacturing) and logistics

FABRICS

Color	Anthracite
Color 2	Lime
Material	RIPSTOP (5mm) : 100% Polyester, PVC coated . 300g/m ²
Material 2	PADDING: 100% Polyester. 180g/m ² (Body + Sleeves)

Main lining	TAFFETA: 100% Polyester. 60g /m ²
Lining 2	OXFORD: 100% Polyester. 300D
Lining 3	FLEECE: 100% Polyester. 300g/m ² (Collar)

TECHNICAL FEATURES

Seams	Taped seams	Reinforcement yokes	Bottom sleeve yoke and belt in Oxford
Hood	Fixed hood concealed in the collar + Elasticated drawstring & blockers	Tightening	Elasticated belt
Collar	Fleece high collar	Finishing details	1 earphone loop inside
Closing	Central zip under flap with velcro + 2 snaps/Chin guard	Visibility	Retro-reflective piping on lower pockets
Sleeves	Raglan sleeves	Marking access	Inner zip for marking access
Cuffs	Ribbed windproof cuffs		
Complementary cuffs	Adjustable cuffs with velcro tab		
Pockets	1 Oxford patch chest pocket with waterproof zip/2 vertical lower zipped pockets under flap /1 patch sleeve pocket with waterproof zip/2 inside patch pockets closed by velcro		

STANDARD(S)



EN14058:2004



2.3.X.X.X.

EN343:2003 + A1:2007



3.2.

Garments for protection against cool environments

Protection from rain



T- SHIRTS



POLO / POLO

SEASONS - COUCHE DE BASE / BASE LAYER

SAFARI

5SAFG / 5SAFN / 5SAFB / 5SAFW



AVANTAGES / BENEFITS



5SAFN



5SAFB



5SAFW



5SAFG

coverguard

TISSUS / FABRICS

- JERSEY: 100% Coton - 220g/m²
- JERSEY: 85% Coton / 15% Viscose - 220g/m² (Gris)

- JERSEY: 100% Cotton - 220g/m²
- JERSEY: 85% Cotton / 15% Viscose - 190g/m² (Grey)

CARACTÉRISTIQUES / FEATURES

- Col polo
- Polo collar

TAILLES SIZES	S	M	L	XL	2XL	3XL
GRIS CHINÉ HEATHER GREY	5SAFGS	5SAFGM	5SAFGL	5SAFGXL	5SAFGXXL	5SAFGXXXL
MARINE NAVY BLUE	5SAFNS	5SAFNM	5SAFNL	5SAFNXL	5SAFNXXL	5SAFNXXXL
NOIR BLACK	5SAFBS	5SAFBM	5SAFBL	5SAFBXL	5SAFBXXL	5SAFBXXXL
BLANC WHITE	5SAFWS	5SAFWM	5SAFWL	5SAFWXL	5SAFWXXL	5SAFWXXXL
CONDITIONNEMENT PACKAGING	Polybag 5 ou par 50 / Polybag 5 or per 50					



T- SHIRTS



T-SHIRT / T-SHIRT

HIKE

5HIKB / 5HIKG / 5HIKN / 5HIKW



AVANTAGES / BENEFITS

- SOFTNESS: thanks to Cotton
- COMFORT: absorbent Cotton



5HIKG



5HIKN



5HIKW



5HIKB



coverguard

TISSUS / FABRICS

- JERSEY: 100% Coton - 190g/m²
- JERSEY: 85% Coton / 15% Viscose - 190g/m² (Gris)
- JERSEY: 100% Cotton - 190g/m²
- JERSEY: 85% Cotton / 15% Viscose - 190g/m² (Grey)

CARACTÉRISTIQUES / FEATURES

- Col rond
- Round neck

TAILLES SIZES	S	M	L	XL	2XL
NOIR BLACK	5HIKBS	5HIKBM	5HIKBL	5HIKBXL	5HIKBXXL
GRIS CHINÉ HEATHER GREY	5HIKGS	5HIKGM	5HIKGL	5HIKGXL	5HIKGXXL
MARINE NAVY BLUE	5HIKNS	5HIKNM	5HIKNL	5HIKNXL	5HIKNXXL
BLANC WHITE	5HIKWS	5HIKWM	5HIKWL	5HIKWXL	5HIKWXXL
CONDITIONNEMENT PACKAGING	Polybag 5 ou par 50 / Polybag 5 or per 50				



T- SHIRTS



SEASONS - COUCHE DE BASE / BASE LAYER

T-SHIRT / T-SHIRT

TRIP

5TRIN / 5TRIB / 5TRIG / 5TRIW



AVANTAGES / BENEFITS

- SOFTNESS: thanks to Cotton
- COMFORT: absorbent Cotton



5TRIB



5TRIG



5TRIW



5TRIN

coverguard

TISSUS / FABRICS

■ JERSEY: 100% Coton - 150g/m²

■ JERSEY: 100% Cotton - 150g/m²

CARACTÉRISTIQUES / FEATURES

■ Round neck

TAILLES SIZES	S	M	L	XL	2XL	3XL
MARINE NAVY BLUE	5TRINS	5TRINM	5TRINL	5TRINXL	5TRINXXL	5TRINXXXL
NOIR BLACK	5TRIBS	5TRIBM	5TRIBL	5TRIBXL	5TRIBXXL	5TRIBXXXL
GRIS CHINÉ HEATHER GREY	5TRIGS	5TRIGM	5TRIGL	5TRIGXL	5TRIGXXL	5TRIGXXXL
BLANC WHITE	5TRIWS	5TRIWM	5TRIWL	5TRIWXL	5TRIWXXL	5TRIWXXXL
CONDITIONNEMENT PACKAGING	Polybag 5 ou par 50 / Polybag 5 or per 50					



BODY WARMER



SOUS-VÊTEMENTS / UNDERWEAR

BODY WARMER*

5BOBT / 5BOBP



AVANTAGES / BENEFITS

- **ABSORBENT AND BREATHABLE:** Modal (50% more absorbent than cotton) is quick-drying and antibacterial
- **SOFTNESS:** Modal feels like a caress on the skin
- **COMFORT:** high elasticity



5BOBT

5BOBP

TISSUS / FABRICS

- **KNIT:** 95% modal / 5% Elastane - 200g/m²

CARACTÉRISTIQUES / FEATURES

LONG SLEEVES T-SHIRT

- V neck
- Raglan long sleeves
- Contrasting topstitchings
- Close to the body

CALEÇON / LEGGING

- Taille élastiquée

- Elasticated waist
- Covered legs
- Contrasting topstitchings
- Close to the body

TAILLES SIZES	M	L	XL
NOIR BLACK	5BOBTM	5BOBTL	5BOBTXL
NOIR BLACK	5BOBPM	5BOBPL	5BOBPXL
CONDITIONNEMENT PACKAGING	Emballage individuel ou par 20 / Individual pack or per 20		



FOOT PROTECTION



SAFETYNESTS



SAFETY SHOES



CLASSI C-SN12

Anti-smash

Wear resistant

Anti-slip

Anti-puncture Oil resistant

Dustproof

Anti-static



Classic S3 safety shoes Product Features

Style No:\$N12

CE Category

S3SRFO

Reference Standard

EN ISO 20345:2022

Product Description

High ankle boot with laces

*Style	Classic
*Upper Lining	Genuine leather
*Outsole	PU, PU+RUBBER
*Toecap	Steel toecap,
*Midsole	Steel plate,Non metallic anti penetration midsole
*CE&UKCA	S3 SRC

The product has been designed and manufactured to comply with Regulation (EU) 2016/425 and subsequent amendments

Product Description:

Medium ankle boot with laces The product has been designed and manufactured to comply with Regulation (EU) 2016/425 and subsequent amendments.

Toecap: Anti-smash steel toe - 83mm width(for size 42)- Resistant to an impact with an energy of 200 Joules.

Midsole: Perforation-resistant steel insert - 1100 N compression protection Upper: Water penetration & absorption embossed leather thickness 1.4mm to 1.6mm

Lining: Water vapour permeable polyester sandwich mesh with abrasion resistance

Insole: Made in solid material breathable mesh and 3mm thickness EVA with antistatic Z shape stitching line

Lace: High durable polyester laces with length 100cm for size EUR 42

Outsole: Slip resistant,oil resistant dual desity PU sole with good abrasion resistance

Size: EUR 36-47



SAFETY SHOES



CODE:NVM

PEAK - HIGH ANKLE SAFETY BOOT (NON-METAL)
MADE IN INDIA



Zecchin
ADVANCED CARE

PACKAGING:
1 Pair Per Box
(10 Pairs Per Carton)



BREATHABLE WATER-RESISTANT LEATHER



SLIP- RESISTANCE [CERAMIC FLOOR + GLYCERINE]



HEAT & COLD INSULATION

CODE	NVM
DESCRIPTION	Peak - High Ankle Safety Boot (Non-Metal)
STANDARD	EN ISO 20346:2022 S3L HI/CI/SR
ORIGIN	India
FEATURES	<ul style="list-style-type: none"> • Genuine Breathable Water-Resistant Leather Upper • Flexible Anti-Puncture Composite Textile Mid-Sole (1100 Newton) • Composite Toe Cap (200 Joules) • Slip- Resistance (Ceramic Floor + Glycerine) - SR Rated • Double Density PU Injection Moulded Sole (Heat Resistance upto 130°C) • Heat & Cold Insulation • Anti-Bacterial & Sanitized Insole with Anti-Static (Washable)
COLOR	Black
SIZE	38 to 47
PACKAGING	1 Pair Per Box (10 Pairs Per Carton)
NET WEIGHT/CTN	16.00 Kg
GROSS WEIGHT/CTN	17.00 Kg
CARTON DIMENSION	Length: 65CM Breadth: 46CM Height: 36CM
CBM PER CARTON	0.11
HS CODE	64034000
WARRANTY	1 Year Against Manufacturing Defects



6 MONTHS WARRANTY AGAINST MANUFACTURING DEFECTS



STYLE SPECIFICATIONS

MODEL

PRI

DESCRIPTION

Mid-Ankle Boot S1P

COLOR

Black

SIZES

EU 38 to 47

STANDARDS

EN ISO 20345:2011

PRODUCT CLASS

S1P

MAKE


INDIA

FEATURES, TECHNOLOGIES & MATERIALS

- Genuine Breathable Leather
- Steel Toe - 200 Joules
- Steel Midplate - 1100 Newton
- PU Sole, Heat Resistant upto 130 deg c
- Anti-Static
- Oil-Resistant PU Sole
- Slip-Resistant PU Sole
- Energy Absorbing Heels
- Anti-Fatigue & Padded Insole



RECOMMENDED USE / INDUSTRIES

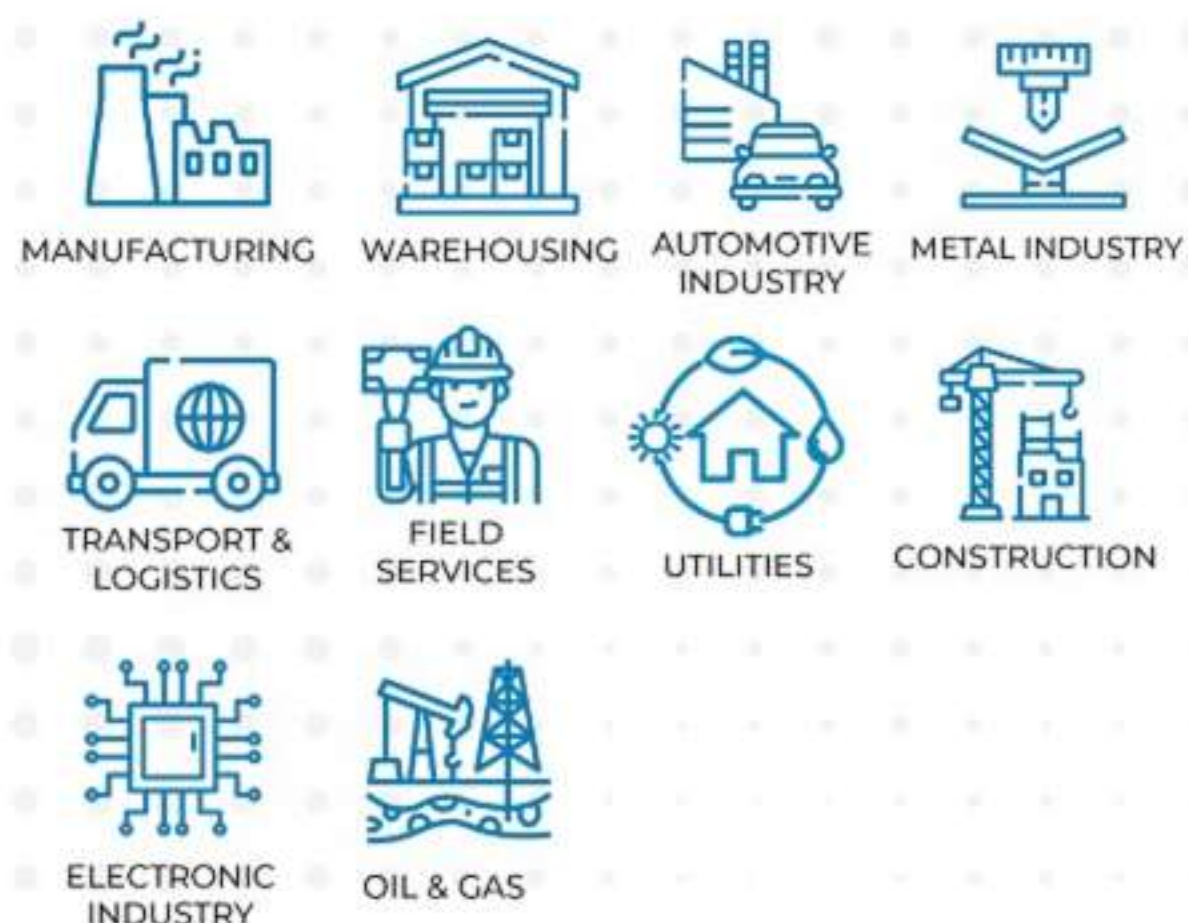



UOR NON METALIC



STYLE SPECIFICATIONS



1 Year WARRANTY AGAINST MANUFACTURING DEFECTS

ARTICLE

UOR

DESCRIPTION

Ankle Boot S3L - Non Metallic

COLOR

Black

SIZE RANGE

EU 36 to 48 (UK 3 to 13)

STANDARDS

EN ISO 20345:2022

PRODUCT CLASS

S3L HI CI SR

MAKE

INDIA

FEATURES, TECHNOLOGIES & MATERIALS

- Genuine Breathable Water Resistant Leather Upper
- Flexible Antipuncture Composite Textile Midsole - 1100 Newton
- Composite Toe Cap - 200 joules
- Slip Resistance Ceramic Floor+Glycerine (SR rated)
- Double Density PU Injection Moulded Sole - Heat Resistant upto 130 deg c
- Heat Insulation & Cold Insulation
- Antibacterial & Sanitized Insole with Antistatic



RECOMMENDED USE / INDUSTRIES





SGK

Ankle Boot S3

6 MONTHS WARRANTY AGAINST
MANUFACTURING DEFECTS



MODEL

SGK

DESCRIPTION

Ankle Boot S3

COLOR

Black

SIZES

EU 38 to 46 (UK 5 to 11)

STANDARDS

CE EN 20345:2011

PRODUCT CLASS

S3 SRC

MAKE

INDIA



FEATURES, TECHNOLOGIES & MATERIALS

- Genuine Breathable Water Resistant Leather Upper
- Steel Midsole - 1100 Newton
- Steel Toe Cap - 200 joules
- Double Density PU Injection Moulded Sole - Heat Resistant upto 130° C



RECOMMENDED USE / INDUSTRIES



SAFETY SHOES



CENTAUR A2021 SLIP-ON

HSN Code 64034000



STYLE
LEATHER
SOLE
TOE CAP
LINING
INSOLE
SIZE

Low Ankle Slip On
Buff Grain Leather In Tango Print
Double Density PU Injection Molded
Fiber Toe
Brown Spacer Lining, 250 GSM
PU Memory Foam Insole
5-12

SAFETY FEATURES:



ALL SAFETY SHOE

HELIX A7025

HSN Code 64034000



STYLE
LEATHER
SOLE
TOE CAP
LINING
LACE
EYELETS

High Ankle
Buff Grain Leather In Barton Print
Double Density PU Injection Molded
EN Imported 200 Joules Steel Toe Cap
Black Cambrelle Lining
Round Black Nylon Laces
Pacified Rust Free D-ring

SAFETY FEATURES:



FACLORE A2024 BLUE & BLACK

HSN Code 64034000



STYLE
UPPER
SOLE
TOE CAP
LINING
INSOLE

Low Ankle Slip On
Safety Grade Knitted Upper
Double Density PU Injection Molded
Fiber Toe
Black Mesh Lining
PU Memory Foam Insole



SAFETY FEATURES:



FALCORE A2014 BLUE

HSN Code 64034000



STYLE
UPPER
SOLE
TOE CAP
LINING
INSOLE


Low Ankle Slip On
Safety Grade Knitted Upper
Double Density PU Injection Molded
Fiber Toe
Black Mesh Lining
PU Memory Foam Insole

SAFETY FEATURES:



FALORE A2016 BLACK

HSN Code 64034000



STYLE
UPPER
SOLE
TOE CAP
LINING
INSOLE

Low Ankle Slip On
Safety Grade Knitted Upper
Single Density PU Injection Molded
EN Imported 200 Joules Steel Toe Cap
Black Spacer Lining 250 GSM
PU Memory Foam Insole

SAFETY FEATURES:





SAFETY SHOES



S3

S3S



TOPAZ

9TOPH / 9TOPL0

coverguard®



9TOPH

9TOPL0

EXTÉRIEUR / OUTDOOR



AVANTAGES / BENEFITS

- Footbridge supplying torsional rigidity.
- Padded collar and bellows tongue for snug fit.



CARACTÉRISTIQUES

FEATURES

- **Upper:** Full grain leather
- **Lining:** Breathable 3D mesh
- **Insole:** Removable, textile and foam
- **Toe cap:** Composite
- **Puncture resistant sole:** Textile
- **Midsole:** PU
- **Outsole:** Rubber nitrile
- **Weight:** 762 g / 642 g per shoe in size 8
- **Color:** Brown / Black



EN ISO 20345:2011*
EN ISO 20345:2022

EU	38	39	40	41	42	43	44	45	46	47
UK	5	5,5	6,5	7,5	8	9	9,5	10,5	11	12
US	5,5	6	7	8	8,5	9,5	10	11	11,5	12,5
HAUTE HIGH	9TOPH 038	9TOPH 039	9TOPH 040	9TOPH 041	9TOPH 042	9TOPH 043	9TOPH 044	9TOPH 045	9TOPH 046	9TOPH 047
BASSE LOW	9TOPL 0038	9TOPL 0039	9TOPL 0040	9TOPL 0041	9TOPL 0042	9TOPL 0043	9TOPL 0044	9TOPL 0045	9TOPL 0046	9TOPL 0047



SAFETY SHOES



S3



0% METAL

PEARL

9PEAH / 9PEAL



9PEAH

coverguard®

EXTÉRIEUR / OUTDOOR



AVANTAGES / BENEFITS

- Footbridge supplying torsional rigidity.
- Heel scuff cap.
- Defined heel for better safety especially on ladders.



CARACTÉRISTIQUES

FEATURES

- **Upper:** Full grain leather & Polyamide mesh
- **Lining:** Breathable 3D mesh
- **Insole:** Removable, textile and foam
- **Toe cap:** Composite
- **Puncture resistant sole:** Textile
- **Midsole:** PU
- **Outsole:** PU
- **Weight:** 652 g / 604 g per shoe in size 8
- **Color:** Black / Orange



EN ISO 20345:2011

EU	38	39	40	41	42	43	44	45	46	47
UK	5	5,5	6,5	7,5	8	9	9,5	10,5	11	12
US	5,5	6	7	8	8,5	9,5	10	11	11,5	12,5
HAUTE HIGH	9PEAH 038	9PEAH 039	9PEAH 040	9PEAH 041	9PEAH 042	9PEAH 043	9PEAH 044	9PEAH 045	9PEAH 046	9PEAH 047
BASSE LOW	9PEAL 038	9PEAL 039	9PEAL 040	9PEAL 041	9PEAL 042	9PEAL 043	9PEAL 044	9PEAL 045	9PEAL 046	9PEAL 047



SAFETY SHOES



S3



0% METAL

OPAL

90PAH / 90PAL

coverguard®



90PAL

AVANTAGES / BENEFITS

- Footbridge supplying torsional rigidity.
- Heel scuff cap.
- Defined heel for better safety especially on ladders.



CARACTÉRISTIQUES

FEATURES

- **Upper:** Full grain leather
- **Lining:** Breathable 3D mesh
- **Insole:** Removable, textile and foam
- **Toe cap:** Composite
- **Puncture resistant sole:** Textile
- **Midsole:** PU
- **Outsole:** PU
- **Weight:** 686 g / 605 g per shoe in size 8
- **Color:** Black / Orange



EN ISO 20345:2011

EU	38	39	40	41	42	43	44	45	46	47
UK	5	5,5	6,5	7,5	8	9	9,5	10,5	11	12
US	5,5	6	7	8	8,5	9,5	10	11	11,5	12,5
HAUTE HIGH	90PAH 038	90PAH 039	90PAH 040	90PAH 041	90PAH 042	90PAH 043	90PAH 044	90PAH 045	90PAH 046	90PAH 047
BASSE LOW	90PAL 038	90PAL 039	90PAL 040	90PAL 041	90PAL 042	90PAL 043	90PAL 044	90PAL 045	90PAL 046	90PAL 047



SAFETY SHOES



S3



FLINT

9FLH370 / 9FLL370

coverguard®



9FLH370

9FLL370

EXTÉRIEUR / OUTDOOR



AVANTAGES / BENEFITS

- Reinforcement in PU.
- Shaped cleats: adherence and gripping on rough floors.
- Grooves for liquid and mud dispersement.
- Raised heel 1 cm and lateral edges: reinforced grip on ladders.
- Front TPU reinforcement.



CARACTÉRISTIQUES

FEATURES

- **Upper:** Action leather
- **Lining:** Breathable 3D mesh
- **Insole:** Removable, perforated EVA
- **Toe cap:** Steel
- **Puncture resistant sole:** steel
- **Midsole:** PU
- **Outsole:** PU
- **Weight:** 701 g / 674 g per shoe in size 8
- **Color:** Caramel



EN ISO 20345:2011

EU	37	38	39	40	41	42	43	44	45	46	47
UK	4	5	5,5	6,5	7,5	8	9	9,5	10,5	11	12
US	4,5	5,5	6	7	8	8,5	9,5	10	11	11,5	12,5
HAUTE HIGH	9FLH 370037	9FLH 370038	9FLH 370039	9FLH 370040	9FLH 370041	9FLH 370042	9FLH 370043	9FLH 370044	9FLH 370045	9FLH 370046	9FLH 370047
BASSE LOW	9FLL 370037	9FLL 370038	9FLL 370039	9FLL 370040	9FLL 370041	9FLL 370042	9FLL 370043	9FLL 370044	9FLL 370045	9FLL 370046	9FLL 370047



SAFETY SHOES



S3



STONE

9STH370 / 9STL370*



coverguard®



AVANTAGES / BENEFITS



- Shaped cleats: adherence and gripping on rough floors.
- Grooves for liquid and mud dispersment.
- Raised heel 1 cm and lateral edges: reinforced grip on ladders.
- TPU outsole: strength and durability.
- Front and back reinforcements.

CARACTÉRISTIQUES

FEATURES

- **Upper:** Pull-up leather
- **Lining:** Breathable 3D mesh
- **Insole:** Removable, perforated EVA
- **Toe cap:** Composite
- **Puncture resistant sole:** Textile
- **Midsole:** PU
- **Outsole:** TPU
- **Weight:** 720 g / 639 g per shoe in size 8
- **Color:** Brown



EN ISO 20345:2011

EU	35	36	37	38	39	40	41	42	43	44	45	46	47	48
UK	2,5	3,5	4	5	5,5	6,5	7,5	8	9	9,5	10,5	11	12	13
US	3	4	4,5	5,5	6	7	8	8,5	9,5	10	11	11,5	12,5	13,5
HAUTE HIGH	9STH 370035	9STH 370036	9STH 370037	9STH 370038	9STH 370039	9STH 370040	9STH 370041	9STH 370042	9STH 370043	9STH 370044	9STH 370045	9STH 370046	9STH 370047	9STH 370048
BASSE LOW	9STL 370035	9STL 370036	9STL 370037	9STL 370038	9STL 370039	9STL 370040	9STL 370041	9STL 370042	9STL 370043	9STL 370044	9STL 370045	9STL 370046	9STL 370047	9STL 370048



SAFETY SHOES



S3



AQUAMARINE

9AQUA



coverguard®

EXTÉRIEUR / OUTDOOR



AVANTAGES / BENEFITS



CARACTÉRISTIQUES

FEATURES

- **Upper:** Full grain leather
- **Lining:** Waterproof and breathable membrane & Moisture wicking non-woven membrane
- **Insole:** Removable, textile and foam
- **Toe cap:** Composite
- **Puncture resistant sole:** Textile
- **Midsole:** PU
- **Outsole:** PU
- **Weight:** 705 g per shoe in size 8
- **Color:** Black / Blue



EN ISO 20345:2011

EU	38	39	40	41	42	43	44	45	46	47
UK	5	5,5	6,5	7,5	8	9	9,5	10,5	11	12
US	5,5	6	7	8	8,5	9,5	10	11	11,5	12,5
HAUTE HIGH	9AQUA 038	9AQUA 039	9AQUA 040	9AQUA 041	9AQUA 042	9AQUA 043	9AQUA 044	9AQUA 045	9AQUA 046	9AQUA 047



SAFETY SHOES



S3

MARBLE

9MARH



coverguard®



AVANTAGES / BENEFITS



CARACTÉRISTIQUES

FEATURES

- **Upper:** Nubuck leather
- **Lining:** Moisture wicking non-woven membrane
- **Insole:** Removable, textile and foam
- **Toe cap:** Composite
- **Puncture resistant sole:** Textile
- **Midsole:** PU
- **Outsole:** PU
- **Weight:** 694 g per shoe in size 8
- **Color:** Brown / Brown



EN ISO 20345:2011

EU	38	39	40	41	42	43	44	45	46	47
UK	5	5,5	6,5	7,5	8	9	9,5	10,5	11	12
US	5,5	6	7	8	8,5	9,5	10	11	11,5	12,5
HAUTE HIGH	9MARH 038	9MARH 039	9MARH 040	9MARH 041	9MARH 042	9MARH 043	9MARH 044	9MARH 045	9MARH 046	9MARH 047



SAFETY SHOES



S3

SAND

9SAND20



coverguard®



- Protection anti-abrasion à l'arrière : sécurité.
- EVA/nitrile rubber outsole: flexible and resistant for long-lasting wear.
- Oxford fabric cut-out at the ankle: optimized flexibility.
- Anti-abrasion protection at the back: safety.



CARACTÉRISTIQUES

- **Upper:** Nubuck leather
- **Lining:** Breathable 3D mesh
- **Toe cap:** Composite
- **Puncture resistant sole:** Textile
- **Midsole:** EVA
- **Outsole:** Rubber nitrile
- **Weight:** 572 g per shoe in size 8
- **Color:** Beige

CE EN ISO 20345:2011

EU	36	37	38	39	40	41	42	43	44	45	46	47
UK	3,5	4	5	5,5	6,5	7,5	8	9	9,5	10,5	11	12
US	4	4,5	5,5	6	7	8	8,5	9,5	10	11	11,5	12,5
HAUTE HIGH	9SAND 20036	9SAND 20037	9SAND 20038	9SAND 20039	9SAND 20040	9SAND 20041	9SAND 20042	9SAND 20043	9SAND 20044	9SAND 20045	9SAND 20046	9SAND 20047



SAFETY SHOES



S3



HYDROCITE

9HYDR



coverguard®

EXTÉRIEUR / OUTDOOR



AVANTAGES / BENEFITS

- Heel and toe scuff caps for a longer shoe's lifespan.
- Padded collar and bellows tongue for snug fit.
- Defined heel for better safety especially on ladders.



CARACTÉRISTIQUES

FEATURES

- **Upper:** Full grain leather
- **Lining:** 3M® Thinsulate® insulation membrane & Breathable 3D mesh
- **Insole:** Removable, textile and cushioned foam
- **Toe cap:** Composite
- **Puncture resistant sole:** Textile
- **Midssole:** PU
- **Outsole:** Rubber nitrile
- **Weight:** 778 g per shoe in size 8
- **Color:** Black / Red



EN ISO 20345:2011

EU	38	39	40	41	42	43	44	45	46	47
UK	5	5,5	6,5	7,5	8	9	9,5	10,5	11	12
US	5,5	6	7	8	8,5	9,5	10	11	11,5	12,5
HAUTE HIGH	9HYDR 038	9HYDR 039	9HYDR 040	9HYDR 041	9HYDR 042	9HYDR 043	9HYDR 044	9HYDR 045	9HYDR 046	9HYDR 047



SAFETY SHOES



S3



TERRALITE

9TERR*



coverguard®



AVANTAGES / BENEFITS

- Heel and toe scuff caps for a longer shoe's lifespan.
- Padded collar and bellows tongue for snug fit.
- Defined heel for better safety especially on ladders.



CARACTÉRISTIQUES

FEATURES

- **Upper:** Full grain leather
- **Lining:** Waterproof and breathable membrane & Breathable 3D mesh
- **Insole:** Removable, textile and cushioned foam
- **Toe cap:** Composite
- **Puncture resistant sole:** Textile
- **Midsole:** PU
- **Outsole:** Rubber nitrile
- **Weight:** 752 g per shoe in size 8
- **Color:** Brown / Orange



EN ISO 20345:2011

EU	38	39	40	41	42	43	44	45	46	47
UK	5	5,5	6,5	7,5	8	9	9,5	10,5	11	12
US	5,5	6	7	8	8,5	9,5	10	11	11,5	12,5
HAUTE HIGH	9TERR 038	9TERR 039	9TERR 040	9TERR 041	9TERR 042	9TERR 043	9TERR 044	9TERR 045	9TERR 046	9TERR 047



SAFETY SHOES



OXFORD S3

KU068D

CE UNI EN ISO 20345:2012 S3 SRC

High safety shoe, back WRU leather thickness 1,8-2,0 mm.
Perspiring and abrasion resistant fabric lining.
Shoes with refracting fabric insert.
Soft, lined and padded tongue.

The shoe satisfies the requirements of slipping resistance on inclined roofs according to **UNI 11583:2015**
TOECAP 200J polymeric **composite non-thermic** according to EN 12568
MIDSOLE flexible antiperforation composite fabric according to EN 12568
SOLE KUBE bidensity polyurethane antistatic, resistant to hydrolysis ISO 5423:92, to hydrocarbons and to abrasion, anti-shock and anti-slipping **SRC**
INSOLE 4001, Comfort insole, perspiring, removable, anatomic, absorbing, antistatic ed antibacterial. Electrical resistance: *the values found prove that this insole is ESD*

THIS PRODUCT COMPLIES WITH THE REQUIREMENTS OF THE STANDARD ASTM F2413-18:

- Impact resistant footwear (I)
- Compression resistant footwear (C)
- Puncture Resistant Footwear (PR)

Size 35-49 Shoe weight Sz 42 gr. 540



coverguard®

CERTIFICATIONS



TECHNOLOGIES AND MATERIALS



SECTORS

- COMPONENTS AND AUTOMOTIVE
- WOOD METAL CARPENTRY
- LOGISTICS AND LIGHT INDUSTRY
- ROOFER

SOLE



In order to avoid the high number of accidents caused by slipping danger, Giasco realized an **excellent anti-slipping product**.

This sole is called **Kube**, a young and sporty styled shoe equipped with a special gripping compound and specific cubic dowels with inverted profile in the outsole.

With thanks to these special characteristics Kube obtained the maximum certification against slipping: **jobs on inclined roofs** (UNI 11583:2015).

ANTISLIPPING TEST RESULTS

	request	results
SRA ceramic + NaLS	HEEL \geq 0,28	0,37
	FLAT \geq 0,32	0,39
SRB steel + glycerol	HEEL \geq 0,13	0,20
	FLAT \geq 0,18	0,30





SAFETY SHOES



GIASCO SAFETY SHOES  TM



3RUN

3PU PATENT

LIGHT SB FO E P CI WRU SRC

3R198E

CE UNI EN ISO 20345:2012 SB FO E P CI WRU SRC

High safety shoe, suede back leather and WRU anti-scratch leather thickness 1,8-2,0 mm.

Perspiring and abrasion resistant fabric lining.

Shoe with refracting fabric insert.

Soft, lined and padded tongue.

COMPLETELY METAL FREE SHOE

TOECAP 200J polymeric **composite non-thermic** according to EN 12568

MIDSOLE flexible antiperforation composite fabric according to EN 12568

SOLE 3 RUN three-densities polyurethane dielectric, to hydrocarbons and to abrasion, anti-shock and anti-slipping **SRC** - **The bottom of the shoe**, within some limits (no humidity, it doesn't concern the upper), offers electrical resistance against tension up to 1.000V - $M \Omega > 1.000$

- **Electrical resistance:** CSA Z195-14 Canadian standard increase 1 kV/sec - voltage 20.000V /60 hz - duration 1 minute

- **Electrical resistance:** ASTM F2413-11 standard increase 1 kV/sec □ voltage 20.000V/60 Hz □ duration 1 minute

Electric flow requirement less than 1,0 mA

ANTI TORSION insert in the sole to assure stability on uneven ground

DIELECTRIC INSOLE, extracomfort bimaterial with activated carbon, removable, anatomic, absorbing, antistatic, perspiring insulating and antibacterial.

Eco-Friendly

FO sole resistance to hydrocarbons

E energy absorption on seat region

P antiperforation midsole

CI cold insulation of sole complex -17°C

Size 36-47 Shoe weight Sz 42 gr 650



CERTIFICATIONS



TECHNOLOGIES AND MATERIALS



SECTORS

 ELECTRICIAN  COLD PLACES

SRC

ANTISLIIPPING TEST RESULTS

SRC ANTI-SLIIPPING SOLE		
SRA ceramic + NaLS	HEEL >= 0,28	0,47
	FLAT >= 0,32	0,47
SRB steel + glycerol	HEEL >= 0,13	0,23
	FLAT >= 0,18	0,26

PLUS



ANTI TORSION

The usage of the anti-torsion shank is finalized to give to the shoe extreme stability on every ground. Mostly indicated for the building sector, where the risks caused by uneven and wet grounds are higher, this technology is very useful for people working on ladders (painters, windows' cleaners, bricklayers) as it increases the stability in the central part of the plant, the mostly standed area on the ladder. It limits the heel stress and helps plant arch and ankle.



3D TRIPLA DENSITA' INIETTATA

3D is a revolutionary certified technology that offers the only shoe with three different layers of polyurethane injected. The most external section, with hard mix, offers the maximum resistance for the surface contact and perfect SRC performances. The middle part, with a softer mix, assures comfort when walking. The higher section, next to the upper, guarantees better stability to the foot. Three densities and the combination of three colors are the special characteristics of this new shoes generation.

SOLE



3Run is a line with a sporty and youthful character, developed for those who work **indoors** and **outdoors on regular surfaces**. 3Run belongs to the **3D generation**. This shoe therefore has **3 different PU injected layers** with relative densities, each specialized to maximize comfort, anti-slip and foot stability. Some of these models are also equipped with an **antitorsion** insert to guarantee further support to the foot at every step.



SAFETY SHOES



GIASCO
SAFETY SHOES



ACTION

VERDI S3

AC880BP

CE UNI EN ISO 20345:2012 S3 SRC

High safety shoe, water-resistant WRU leather thickness 1,8-2,0 mm.

Perspiring and abrasion resistant fabric lining.

Shoe with refracting fabric insert.

Lined and padded tongue.

TOECAP 200J polymeric **composite non-thermic** according to EN 12568

MIDSOLE antiperforation steel according to EN 12568

SOLE ACTION bidensity polyurethane antistatic, resistant to hydrolysis ISO 5423:92, to hydrocarbons and to abrasion, anti-shock and anti-slipping **SRC**

INSOLE 4001, Comfort insole, perspiring, removable, anatomic, absorbing, antistatic ed antibacterial. Electrical resistance: *the values found prove that this insole is ESD*

Size 36-49 Shoe weight Sz 42 gr. 550



CERTIFICATIONS



TECHNOLOGIES AND MATERIALS



SECTORS

FARMING AND MINING COMPONENTS AND AUTOMOTIVE WOOD METAL CARPENTRY BUILDING AND HEAVY INDUSTRY LOGISTICS AND LIGHT INDUSTRY

SOLE



Action is a shoe studied for external jobs, with soft lines making it very light and comfortable.

SRC

ANTISLIPPING TEST RESULTS



SRC
ANTI-SLIPPING SOLE

SRA ceramic + NaLS	HEEL >= 0,28 FLAT >= 0,32	0,39 0,36
SRB steel + glycerol	HEEL >= 0,13 FLAT >= 0,18	0,26 0,22



S3

SIBERITE

9SIBE



coverguard®

EXTÉRIEUR / OUTDOOR



AVANTAGES / BENEFITS

- Cold insulation.
- Outsole resistant to -25°C.
- Footbridge supplying torsional rigidity.



CARACTÉRISTIQUES

FEATURES

- **Upper:** Full grain leather
- **Lining:** Faux fur
- **Insole:** Removable, faux fur and foam
- **Toe cap:** Steel
- **Puncture resistant sole:** steel
- **Midsole:** PU
- **Outsole:** PU
- **Weight:** 736 g per shoe in size 8
- **Color:** Black



EN ISO 20345:2011

EU	38	39	40	41	42	43	44	45	46	47
UK	5	5,5	6,5	7,5	8	9	9,5	10,5	11	12
US	5,5	6	7	8	8,5	9,5	10	11	11,5	12,5
HAUTE HIGH	9SIBE 38	9SIBE 39	9SIBE 4	9SIBE 41	9SIBE 42	9SIBE 43	9SIBE 44	9SIBE 45	9SIBE 46	9SIBE 47



SAFETY SHOES



S3



AVENTURINE

9AVEH* / 9AVEL*



9AVEH

9AVEL



coverguard



AVANTAGES / BENEFITS

- Padding for snug fit.
- Defined heel for better safety especially on ladders.



CARACTÉRISTIQUES

FEATURES

- **Upper:** Full grain leather
- **Lining:** Moisture wicking non-woven membrane
- **Insole:** Attached, textile and foam
- **Toe cap:** Composite
- **Puncture resistant sole:** Textile
- **Midsole:** PU
- **Outsole:** PU
- **Weight:** 603 g / 565 g per shoe in size 8
- **Color:** Black



EN ISO 20345:2011

EU	38	39	40	41	42	43	44	45	46	47
UK	5	5,5	6,5	7,5	8	9	9,5	10,5	11	12
US	5,5	6	7	8	8,5	9,5	10	11	11,5	12,5
HAUTE HIGH	9AVEH 038	9AVEH 039	9AVEH 040	9AVEH 041	9AVEH 042	9AVEH 043	9AVEH 044	9AVEH 045	9AVEH 046	9AVEH 047
BASSE LOW	9AVEL 038	9AVEL 039	9AVEL 040	9AVEL 041	9AVEL 042	9AVEL 043	9AVEL 044	9AVEL 045	9AVEL 046	9AVEL 047



SAFETY SHOES



S3

BLACK STAR

9BLAC10



coverguard



AVANTAGES / BENEFITS

- PU/PU "soft" outsole: cushioning
- Defined heel: stability on ladder.
- Large side zip: easy to put on.
- Foam insole with cushioning : comfort



CARACTÉRISTIQUES

FEATURES

- **Upper:** Oxford & grain leather
- **Lining:** Breathable 3D mesh
- **Insole:** Removable, textile and foam
- **Toe cap:** Composite
- **Puncture resistant sole:** Textile
- **Midsole:** PU
- **Outsole:** PU
- **Weight:** 695 g per shoe in size 8
- **Color:** Black

CE EN ISO 20345:2011

EU	36	37	38	39	40	41	42	43	44	45	46	47	48	49
UK	3,5	4	5	5,5	6,5	7,5	8	9	9,5	10,5	11	12	13	13,5
US	4	4,5	5,5	6	7	8	8,5	9,5	10	11	11,5	12,5	13,5	14
HAUTE HIGH	9BLAC 10036	9BLAC 10037	9BLAC 10038	9BLAC 10039	9BLAC 10040	9BLAC 10041	9BLAC 10042	9BLAC 10043	9BLAC 10044	9BLAC 10045	9BLAC 10046	9BLAC 10047	9BLAC 10048	9BLAC 10049



S3



PYROXITE

9PROY



coverguard™

EXTÉRIEUR / OUTDOOR



AVANTAGES / BENEFITS

- Thin padded breathable lining.
- Cushionned insole.



CARACTÉRISTIQUES FEATURES

- **Upper:** Full grain leather
- **Lining:** Breathable 3D mesh
- **Insole:** Removable, textile and cushionned foam
- **Toe cap:** Steel
- **Puncture resistant sole:** steel
- **Midsole:** PU
- **Outsole:** PU
- **Weight:** 832 g per shoe in size 8
- **Color:** Brown



EN ISO 20345:2011

EU	38	39	40	41	42	43	44	45	46	47
UK	5	5,5	6,5	7,5	8	9	9,5	10,5	11	12
US	5,5	6	7	8	8,5	9,5	10	11	11,5	12,5
HAUTE HIGH	9PROY 038	9PROY 039	9PROY 040	9PROY 041	9PROY 042	9PROY 043	9PROY 044	9PROY 045	9PROY 046	9PROY 047



S3

PATAGONITE

9PATA



coverguard™



AVANTAGES / BENEFITS

- Cold insulation.
- Cushionned insole.



CARACTÉRISTIQUES FEATURES

- **Upper:** Full grain leather
- **Lining:** Faux fur
- **Insole:** Removable, textile and cushionned foam
- **Toe cap:** Steel
- **Puncture resistant sole:** steel
- **Midsole:** PU
- **Outsole:** PU
- **Weight:** 867 g per shoe in size 8
- **Color:** Brown

CE EN ISO 20345:2011

EU	39	40	41	42	43	44	45	46	47
UK	5,5	6,5	7,5	8	9	9,5	10,5	11	12
US	6	7	8	8,5	9,5	10	11	11,5	12,5
HAUTE HIGH	9PATA 039	9PATA 040	9PATA 041	9PATA 042	9PATA 043	9PATA 044	9PATA 045	9PATA 046	9PATA 047



SAFETY SHOES



S3

PERLITE 9PERL



coverguard™

EXTÉRIEUR / OUTDOOR



AVANTAGES / BENEFITS

- Cold insulation.
- Cushioned insole.



CARACTÉRISTIQUES FEATURES

- **Upper:** Full grain leather
- **Lining:** Faux fur
- **Insole:** Removable, textile and cushioned foam
- **Toe cap:** Steel
- **Puncture resistant sole:** steel
- **Midsole:** PU
- **Outsole:** PU
- **Weight:** 843 g per shoe in size 8
- **Color:** Black

CE EN ISO 20345:2011

EU	38	39	40	41	42	43	44	45	46	47
UK	5	5,5	6,5	7,5	8	9	9,5	10,5	11	12
US	5,5	6	7	8	8,5	9,5	10	11	11,5	12,5
HAUTE HIGH	9PERL 038	9PERL 039	9PERL 040	9PERL 041	9PERL 042	9PERL 043	9PERL 044	9PERL 045	9PERL 046	9PERL 047

CONDITIONNEMENT: 1 paire de chaussures (DROIT/GAUCHE) par boîte de 5 paires



S3

PIÉMONTITE

9PIEM



coverguard



AVANTAGES / BENEFITS

- Padded ankles for snug fit.
- Heel scuff cap inserts.
- Footbridge supplying torsional rigidity.



CARACTÉRISTIQUES

FEATURES

- **Upper:** Full grain leather
- **Lining:** Faux fur
- **Insole:** Removable, textile and foam
- **Toe cap:** Composite
- **Puncture resistant sole:** Textile
- **Midsole:** PU
- **Outsole:** PU
- **Weight:** 798 g per shoe in size 8
- **Color:** Brown



EN ISO 20345:2011

EU	38	39	40	41	42	43	44	45	46	47
UK	5	5,5	6,5	7,5	8	9	9,5	10,5	11	12
US	5,5	6	7	8	8,5	9,5	10	11	11,5	12,5
HAUTE HIGH	9PIEM 038	9PIEM 039	9PIEM 040	9PIEM 041	9PIEM 042	9PIEM 043	9PIEM 044	9PIEM 045	9PIEM 046	9PIEM 047



SAFETY SHOES



S3

PYROPE

9PYRO



coverguard

EXTÉRIEUR / OUTDOOR



AVANTAGES / BENEFITS

- Heel and toe Stark scuff caps.
- Cushioned insole.
- Footbridge supplying torsional rigidity.



CARACTÉRISTIQUES

FEATURES

- **Upper:** Pull-up leather
- **Lining:** Faux fur
- **Insole:** Removable, textile and cushioned foam
- **Toe cap:** Composite
- **Puncture resistant sole:** Textile
- **Midsole:** PU
- **Outsole:** PU
- **Weight:** 724 g per shoe in size 8
- **Color:** Brown



EN ISO 20345:2011

EU	37	38	39	40	41	42	43	44	45	46	47
UK	4	5	5,5	6,5	7,5	8	9	9,5	10,5	11	12
US	4,5	5,5	6	7	8	8,5	9,5	10	11	11,5	12,5
HAUTE HIGH	9PYRO 037	9PYRO 038	9PYRO 039	9PYRO 040	9PYRO 041	9PYRO 042	9PYRO 043	9PYRO 044	9PYRO 045	9PYRO 046	9PYRO 047



SAFETY SHOES



S4 AGRI-FOOD



FOODPRO PUROFORT MULTIGRIP SAFETY

9PUMG*



SYNTHETIC BOOTS

- Women fit (size 4 to 6.5).
- Flexible and lightweight for use all day long.
- Ergonomic sole for excellent foot support

FEATURES

- **Upper:** Purofort®
- **Lining:** Polyamide
- **Insole:** Polyurethane
- **Toe cap:** Steel
- **Outsole:** PU
- **Weight:** 800 g per shoe in size 8
- **Color:** White / Blue



EN ISO 20345:2011

S4 FOOD INDUSTRY



FOODPRO PUROFORT MULTIGRIP SAFETY

9PURO20*



BENEFITS

- Iconic boot for the food industry, efficient in all situations
- Women fit.
- Flexible and lightweight for use all day long.
- Ergonomic sole for excellent foot support

FEATURES

coverguard

- **Upper:** Purofort®
- **Lining:** Polyamide
- **Insole:** Polyurethane
- **Toe cap:** Steel
- **Outsole:** PU
- **Weight:** 800 g per shoe in size 8
- **Color:** Blue



EN ISO 20345:2011

EU	36	37	38	39	40	41	42	43	44	45	46	47	48	49
UK	3,5	4	5	5,5	6,5	7,5	8	9	9,5	10,5	11	12	13	13,5
US	4	4,5	5,5	6	7	8	8,5	9,5	10	11	11,5	12,5	13,5	14
9PUMG	9PUMG 036	9PUMG 037	9PUMG 038	9PUMG 039	9PUMG 040	9PUMG 041	9PUMG 042	9PUMG 043	9PUMG 044	9PUMG 045	9PUMG 046	9PUMG 047	9PUMG 048	9PUMG 049
9PURO	9PURO 20036	9PURO 20037	9PURO 20038	9PURO 20039	9PURO 20040	9PURO 20041	9PURO 20042	9PURO 20043	9PURO 20044	9PURO 20045	9PURO 20046	9PURO 20047	9PURO 20048	9PURO 20049

SAFETY SHOES



FOOD INDUSTRY



MOON - ESD

9MOOL



coverguard™

BENEFITS

- Lightweight for use all day long.
- Rounded heel for more comfortable driving.



- **Upper:** Microfiber
- **Lining:** Breathable 3D mesh
- **Insole:** Attached, textile and foam
- **Toe cap:** Composite
- **Midsole:** PU
- **Outsole:** PU
- **Weight:** 442 g per shoe in size 8
- **Color:** White / Grey



EN ISO 20345:2011*
EN ISO 20345:2022

EU	35	36	37	38	39	40	41	42	43	44	45	46	47	48
UK	2,5	3,5	4	5	5,5	6,5	7,5	8	9	9,5	10,5	11	12	13
US	3	4	4,5	5,5	6	7	8	8,5	9,5	10	11	11,5	12,5	13,5
BASSE LOW	9MOOL 035	9MOOL 036	9MOOL 037	9MOOL 038	9MOOL 039	9MOOL 040	9MOOL 041	9MOOL 042	9MOOL 043	9MOOL 044	9MOOL 045	9MOOL 046	9MOOL 047	9MOOL 048



SAFETY SHOES



FOOD INDUSTRY



HOWLITE

9HOWL04



coverguard

SPECIALTIES



BENEFITS

- Easy-on and easy-off.
- Protective cover.
- Rounded heel for more comfortable driving.



FEATURES

- **Upper:** Microfiber
- **Lining:** Breathable 3D mesh
- **Insole:** Removable, textile and foam
- **Toe cap:** Steel
- **Midsole:** PU
- **Outsole:** PU
- **Weight:** 475 g per shoe in size 8
- **Color:** White / Grey



EN ISO 20345:2011*
EN ISO 20345:2022

EU	35	36	37	38	39	40	41	42	43	44	45	46	47
UK	2,5	3,5	4	5	5,5	6,5	7,5	8	9	9,5	10,5	11	12
US	3	4	4,5	5,5	6	7	8	8,5	9,5	10	11	11,5	12,5
BASSE LOW	9HOWL 04035	9HOWL 04036	9HOWL 04037	9HOWL 04038	9HOWL 04039	9HOWL 04040	9HOWL 04041	9HOWL 04042	9HOWL 04043	9HOWL 04044	9HOWL 04045	9HOWL 04046	9HOWL 04047

OKENITE

9OKEL



coverguard

AVANTAGES / BENEFITS

- Easy-on and easy-off.
- Protective cover.
- Rounded heel for more comfortable driving.



- **Upper:** Microfiber
- **Lining:** Breathable 3D mesh
- **Insole:** Removable, textile and foam
- **Toe cap:** Composite
- **Midsole:** PU
- **Outsole:** PU
- **Weight:** 427 g per shoe in size 8
- **Color:** White / Grey



EN ISO 20345:2011*
EN ISO 20345:2022



FOOD INDUSTRY



OKENITE CLOG - ESD

90KEC



coverguard™

SPECIALTIES



BENEFITS

- Easy-on and easy-off.
- Lightweight for use all day long.
- Semi-closed heel for extra stability.
- Antistatic outsole (A).
- Energy absorbing heel (E).



FEATURES

- **Upper:** Microfiber
- **Lining:** Breathable 3D mesh
- **Insole:** Removable, textile and foam
- **Toe cap:** Composite
- **Midsole:** PU
- **Outsole:** PU
- **Weight:** 409 g per shoe in size 8
- **Color:** White / Grey



EN ISO 20345:2011*
EN ISO 20345:2022

EU	35	36	37	38	39	40	41	42	43	44	45	46	47
UK	2,5	3,5	4	5	5,5	6,5	7,5	8	9	9,5	10,5	11	12
US	3	4	4,5	5,5	6	7	8	8,5	9,5	10	11	11,5	12,5
BASSE LOW	90KEC 035	90KEC 036	90KEC 037	90KEC 038	90KEC 039	90KEC 040	90KEC 041	90KEC 042	90KEC 043	90KEC 044	90KEC 045	90KEC 046	90KEC 047



HAND PROTECTION



SAFETYNESTS



SAFETY GLOVES



DRY ENVIRONMENT

EUROCUT P600

1CUPF00



- Niveau maximum de protection coupure : CUT F
- Dexterité
- Renfort pouce index
- Tactile
- Protection chaleur de contact 100°C / 15 sec.
- Peu salissant

- Highest level of cut protection: CUT F
- Dexterity
- Crotch between thumb and index
- Touchscreen
- Heat protection 100°C / 15 sec.
- Dirt resistant



coverguard



REF	DESCRIPTION	JAUGE GAUGE	TAILLES SIZES	NORMES STANDARDS	CE	COND.	PACK.
1CUPF00	<p>Tricot gris sans couture à base de HDPE, Enduction palmaire PU noir, Renfort nitrile entre le pouce et l'index, Poignet tricot Certifié OEKO-TEX® STANDARD 100, CQ 1301/1, IFTH</p> <p>Grey seamless support from HDPE, Black PU palm coating, Nitrile crotch reinforcement between thumb and index, Knitted wrist Certified OEKO-TEX® STANDARD 100, CQ 1301/1, IFTH</p>	13	1CUPF00007 - 7 1CUPF00008 - 8 1CUPF00009 - 9 1CUPF00010 - 10 1CUPF00011 - 11	EN388:2016 4.X.4.F. EN407:2004 X1.X.XXX ANSI A6 CUT		10 / 100	LS/SS



MILIEU HUILEUX / OILY ENVIRONMENT

EUROCUT N313

1CUNS00



- Confort : tricot sans fibre de verre
- Dexterité optimisée
- Durabilité

- Comfort: fibre glass-free liner
- Optimized dexterity
- Long durability

coverguard



REF	DESCRIPTION	JAUGE GAUGE	TAILLES SIZES	NORMES STANDARDS	CE	COND.	PACK.
1CUNS00	<p>Tricot sans couture gris, à base de HDPE, polyamide, élasthane, Enduction palmaire en nitrile lisse noir, Tactile, Poignet tricot. Certifié OEKO-TEX® STANDARD 100, CQ 1301/1, IFTH</p> <p>Grey seamless gloves, from HDPE, polyamide, elastane, Black smooth nitrile palm coating, Touchscreen, Knitted wrist. Certified OEKO-TEX® STANDARD 100, CQ 1301/1, IFTH</p>	13	1CUNS00007 - 7 1CUNS00008 - 8 1CUNS00009 - 9 1CUNS00010 - 10 1CUNS00011 - 11	EN388:2016 + A12:2018 4X.42.C. ANSI A5 CUT		10 / 100	LS/SS



SAFETY GLOVES



ENVIRONMENT

EURO CUT N606

1CUFF00



- COVERPERF DURABILITY: Ultra high abrasion resistance
- Crotch between thumb and index
- Highest level of cut protection: CUT F
- Second skin sensation: comfort and high dexterity
- High breathability
- Touchscreen - Sanitized
- Heat protection 100°C / 15 sec

coverguard



REF	DESCRIPTION	JAUGE GAUGE	TAILLES SIZES	NORMES STANDARDS	CE	COND.	PACK.
1CUFF00	Black seamless support from HDPE, Kevlar, spandex, Black nitrile micro-foam palm coating, Reinforcement on thumb and Index, Sanitized treatment: prevents the development of bacteria and odors Knitted wrist.	18	1CUFF00007 - 7 1CUFF00008 - 8 1CUFF00009 - 9 1CUFF00010 - 10 1CUFF00011 - 11 1CUFF00012 - 12	EN388:2016 4X.42.F. EN407:2004 X1X.XXX ANSI A6 CUT		10 / 100	LS/SS



SAFETY GLOVES

DRY ENVIRONMENT



COUPURE - TRAVAUX DE PRÉCISION / CUT - PRECISION WORK

EUROCUT N600

1CRUF0



- COVERPERF DURABILITY: Ultra high abrasion resistance
- Crotch between thumb and index
- Highest level of cut protection: CUT F
- Dexterity
- Good breathability
- Touchscreen

coverguard



REF	DESCRIPTION	JAUGE GAUGE	TAILLES SIZES	NORMES STANDARDS	CE	COND.	PACK.
1CRUF0	Black seamless support from HDPE, polyamide, elastane, Black nitrile foam palm coating, Nitrile patch reinforcement between thumb and index, Knitted wrist.	13	1CRUF00007 - 7 1CRUF00008 - 8 1CRUF00009 - 9 1CRUF00010 - 10 1CRUF00011 - 11 1CRUF00012 - 12	EN388:2016 4X.4.3.F.	ANSI A6 CUT	5 / 50	LS/SS

62



DRY ENVIRONMENT

COUPURE - TRAVAUX DE PRÉCISION / CUT - PRECISION WORK

EUROCUT P313

1CUPC00



- Second skin feel
- Comfort: fibreglass-free liner
- Optimized dexterity
- Maximum breathability

coverguard



REF	DESCRIPTION	JAUGE GAUGE	TAILLES SIZES	NORMES STANDARDS	CE	COND.	PACK.
1CUPC00	Grey seamless gloves, from HDPE, polyamide, elastane, Grey polyurethane palm coating, Touchscreen, Knitted wrist.	13	1CUPC00007 - 7 1CUPC00008 - 8 1CUPC00009 - 9 1CUPC00010 - 10 1CUPC00011 - 11	EN388:2016 + A1:2016 4X4.2.C.	ANSI A4 CUT	10 / 100	LS/SS



SAFETY GLOVES



ENVIRONMENT

EUROCUT FOOD

1CUFO00



- COVERPERF DURABILITY: Washability - Performance guaranteed up to 20 cycles at 70°C
- Very high cut protection
- Long cuff: reinforced forearm protection
- Suitable for food contact (all types of food)
- Heat contact protection 100°C / 15 sec.

coverguard



REF	DESCRIPTION	JAUGE GAUGE	TAILLES SIZES	NORMES STANDARDS	CE	COND.	PACK.
1CUFO00	White seamless support from HPPE and Nylon, Knitted wrist, Long cuff 20cm Food contact : suitable for all types of food Washable for 20 cycles at 70°C Ambidextrous, Sold by piece Certified OEKO-TEX® STANDARD 100, CQ 1301/1, IFTH	13	1CUFO00007 - 7 1CUFO00008 - 8 1CUFO00009 - 9 1CUFO00010 - 10 1CUFO00011 - 11	EN3882016 + A12218 2.3.4.X.E EN4072020 X1.X.XXX ANSI A5 CUT		10 / 100	LS/SS

57



SAFETY GLOVES



DRY ENVIRONMENT

EURO CUT N303

1CUCC00



- COVERPERF BREATHABILITY: Comfort, maximum breathability
- COVERPERF SKINCARE: Hypoallergenic, tested in an independent laboratory
- Dexterity
- Very good grip in dry area
- Touchscreen

EURO CUT N300

1CUNC00



- RESISTANT: Crotch between thumb and index
- Dexterity
- Good grip in slightly oily areas



coverguard



REF	DESCRIPTION	JAUGE GAUGE	TAILLES SIZES	NORMES STANDARDS	CE	COND.	PACK.
1CUCC00	Grey seamless support from HDPE, elastane, Black nitrile micro-foam palm coating, Knitted wrist.	18	1CUCC00006 - 6 1CUCC00007 - 7 1CUCC00008 - 8 1CUCC00009 - 9 1CUCC00010 - 10 1CUCC00011 - 11 1CUCC00012 - 12	EN388:2016 4X.42.C.	ANSI A3 CUT	5 / 50	LS/SS
1CUNC00	Blue seamless support from HDPE, polyester, elastane, Black nitrile foam palm coating, Nitrile patch reinforcement between thumb and index Knitted wrist.	13	1CUNC00007 - 7 1CUNC00008 - 8 1CUNC00009 - 9 1CUNC00010 - 10 1CUNC00011 - 11 1CUNC00012 - 12	EN388:2016 4X.43.C.	ANSI A3 CUT	5 / 50	LS/SS



SAFETY GLOVES



DRY ENVIRONMENT

COUPURE - TRAVAUX DE PRÉCISION / CUT - PRECISION WORK

EUROCUT SLEEVE 450 & 600

1CSLE00



- Extra thin knitted part on the hand with anatomical shape and thumb hole.
- Specifically developed to be worn with a glove.
- Heat protection 100°C / 15 sec.
- Available in 2 length 45 / 60cm
- 1 piece.

EUROCUT P330

1CRAL00*



- Long sleeve
- High dexterity
- Good value for money
- Dirt resistant

coverguard



1CSLE00450



1CSLE00600



REF	DESCRIPTION	JAUGE GAUGE	TAILLES SIZES	NORMES STANDARDS	CE	COND.	PACK.
1CSLE00	Grey seamless supported sleeve from HDPA, polyester, elastane, hook and loop arm adjustment, extra-thin knitted part on the hand with anatomical shape and thumb hole, ambidextrous.	13	1CSLE00450 - 45cm 1CSLE00600 - 60cm	EN388:2016 + A1:2018 3.3.4.X.C.	EN407:2004 X1.X.X.X.X	12 / 120	LS/SS
1CRAL00	Mottled grey seamless support from HDPA, elastane, Grey polyurethane palm coating, Long cuff 10cm	13	1CRAL00006 - 6 1CRAL00007 - 7 1CRAL00008 - 8 1CRAL00009 - 9 1CRAL00010 - 10 1CRAL00011 - 11	EN388:2016 4.3.4.2.C.		12 / 120	Multiple V.M.



SAFETY GLOVES



ENVIRONMENT

EUROCUT P500

1CRPG



- Optimized dexterity
- Grip
- Extended service life (polyamide)
- Minimal soiling

EUROCUT 6810

MO6810



- High dexterity
- Good grip in dry areas



coverguard™

EUROCUT 1CRAG

1CRAG



- High dexterity
- Good grip in dry areas

EUROCUT P318

1CRPB



- Excellent dexterity and grip: reduces fatigue and improves productivity
- Second skin sensation

REF	DESCRIPTION	JAUGE GAUGE	TAILLES SIZES	NORMES STANDARDS	CE	COND.	PACK.
1CRPG	Mottled grey seamless support from HPPE, mineral fibres, polyamide, elastane, Grey polyurethane palm coating, Knitted wrist	13	1CRPG06 - 6 1CRPG07 - 7 1CRPG08 - 8 1CRPG09 - 9 1CRPG10 - 10 1CRPG11 - 11	EN388:2016 4.X.4.3.D.		5 / 50	LS/SS CAR.
MO6810	White seamless support from HDPA and elastane; white polyurethane palm coating; knitted wrist.	13	6807 - 7 6808 - 8 6809 - 9 6810 - 10 6811 - 11	EN388:2016 4.3.4.2.C.		12 / 144	Multiple V.M.
1CRAG	Grey seamless support from HDPA and elastane; grey polyurethane palm coating; knitted wrist.	13	1CRAG06 - 6 1CRAG07 - 7 1CRAG08 - 8 1CRAG09 - 9 1CRAG10 - 10 1CRAG11 - 11 1CRAG12 - 12	EN388:2016 4.3.4.2.C.		12 / 120	Multiple V.M.
1CRPB	Light blue seamless support from HPPE, polyamide, elastane, Grey PU palm coating, Knitted wrist	18	1CRPB06 - 6 1CRPB07 - 7 1CRPB08 - 8 1CRPB09 - 9 1CRPB10 - 10 1CRPB11 - 11	EN388:2016 4.X.4.2.B.		5 / 50	LS/SS



SAFETY GLOVES



coverguard

CUT - PRECISION WORK

DRY ENVIRONMENT

EUROCUT N560

1CRLG



- Extended service life (polyamide)
- Optimized dexterity
- Dirt resistant



EUROCUT N360

1CRVG



- Extended service life
- Optimized dexterity
- Dirt resistant



EUROCUT N318HV

1CRNY*



- Excellent dexterity and grip: reduces fatigue and improves productivity
- Breathability
- Second skin sensation
- Extended service life
- Easy wear control (Hi-Viz)



EUROCUT N318HVC

1CRBF



- Excellent dexterity and grip: reduces fatigue and improves productivity
- Ergonomical shape
- Breathability
- Easy wear control (Hi-Viz)



REF	DESCRIPTION	JAUGE GAUGE	TAILLES SIZES	NORMES STANDARDS	CE	COND.	PACK.
1CRLG	Mottled grey seamless support from HPPE, mineral fibres, polyamide, elastane, Palm coating in black nitrile micro-foam, Knitted wrist	13	1CRLG06 - 6 1CRLG07 - 7 1CRLG08 - 8 1CRLG09 - 9 1CRLG10 - 10 1CRLG11 - 11	EN388 2016 4.3.4.4.D.		5 / 50	LS/SS
1CRVG	Mottled grey seamless support from HPPE, polyamide, elastane, Palm coating in black nitrile micro-foam, Knitted wrist	13	1CRVG06 - 6 1CRVG07 - 7 1CRVG08 - 8 1CRVG09 - 9 1CRVG10 - 10 1CRVG11 - 11	EN388 2016 4.X.4.3.B.		5 / 50	LS/SS
1CRNY*	Yellow Hi-Viz seamless support from HPPE, polyamide, elastane, Micro-foam black nitrile palm coating Knitted wrist	18	1CRNY06 - 6 1CRNY07 - 7 1CRNY08 - 8 1CRNY09 - 9 1CRNY10 - 10 1CRNY11 - 11	EN388 2016 4.X.4.2.B.		5 / 50	LS/SS
1CRBF	Yellow Hi-Viz seamless support from HPPE, polyamide and elastane, Micro-foam black nitrile 3/4 coating, Ergonomic shape, Knitted wrist	18	1CRBF06 - 6 1CRBF07 - 7 1CRBF08 - 8 1CRBF09 - 9 1CRBF10 - 10 1CRBF11 - 11	EN388 2016 4.X.4.2.B.		5 / 50	LS/SS



SAFETY GLOVES



DRY ENVIRONMENT

EUROLITE 13P100

1PUBW



- Comfort
- Dexterity (Second skin sensation)
- Breathability
- Individual polybag, with Eurohole

EUROLITE 13P110

1PUBB



- Comfort
- Dexterity (Second skin sensation)
- Breathability
- Individual polybag, with Eurohole






coverguard

EUROLITE 13P105

1PUBG



- Comfort
- Dexterity (Second skin sensation)
- Breathability
- Individual polybag, with Eurohole

REF	DESCRIPTION	JAUGE GAUGE	TAILLES SIZES	NORMES STANDARDS	CE	COND.	PACK.
1PUBW	White seamless support from polyester, White polyurethane palm coating, Knitted wrist	13	1PUBW06 - 6 1PUBW07 - 7 1PUBW08 - 8 1PUBW09 - 9 1PUBW10 - 10 1PUBW11 - 11	EN388:2016  31.31X		10 / 100	LS/SS
1PUBB	Black seamless support from polyester, Black polyurethane palm coating, Knitted wrist	13	1PUBB06 - 6 1PUBB07 - 7 1PUBB08 - 8 1PUBB09 - 9 1PUBB10 - 10 1PUBB11 - 11	EN388:2016  31.31X		10 / 100	LS/SS
1PUBG	Grey seamless support from polyester, Grey polyurethane palm coating, Knitted wrist	13	1PUBG06 - 6 1PUBG07 - 7 1PUBG08 - 8 1PUBG09 - 9 1PUBG10 - 10 1PUBG11 - 11	EN388:2016  31.31X		10 / 100	LS/SS



SAFETY GLOVES



LOVES ART MFG CO.

WELDING GLOVES



GA-WDG-001
Red cow split leather welding gloves. Fully lined. 14"



GA-WDG-002
Green cow split leather welding gloves. Fully lined. 14"



GA-WDG-003
Blue cow split leather. Reinforced thumb and palm. Fully lined. Kevlar Stitched. 14"



GA-WDG-004
Aluminized Back leather Welding Gloves. Split leather on palm. kevlar lining. Kevlar stitching.



GA-WDG-005
High quality, extra thick blue cow split leather. Kevlar stitched. Lined and welted. Reinforced palm and thumb. 16"



GA-WDG-006
Cow split leather. Reinforced back. Gauntlet cuffs. Fully lined. Shirred elastic at back. 16"



GA-WDG-007
Cow split leather welding gloves. Reinforced thumb & palm. Full cotton lined. Fully welted. 14"



GA-WDG-008
Extra long cow split leather welding gloves. Full cotton lined. Thumb strap. 23.5"



GA-WDG-009
Brown cow split leather welding gloves. Reinforced thumb & palm. Full cotton lined. Fully welted. 14"



SAFETY GLOVES



GLOVES ART MFG CO.

MIG/TIG WELDING GLOVES



GA-TM-001
TIG Welding Glove
Cow grain leather with Split leather cuff.



GA-TM-002
Top Grain Goatskin TIG Welding Gloves with 4" Split leather Cuff. Reinforced thumb. Kevlar stitched.



GA-TM-003
TIG welding gloves
Top quality cow leather with an extra wide cowhide split leather cuff. Cotton fleece lined. Kevlar stitched.



GA-TM-004
Cowhide grain leather palm TIG welding glove. Split cowhide leather back. Straight thumb. 5" split leather gauntlet cuff



GA-TM-005
TIG welding gloves. Premium split goat skin glove and cuff with a straight thumb with thumb strap design



GA-TM-006
MIG Welding Gloves. Premium tan grain cowhide palm for dexterity with durable rust split cowhide back. Reverse goatskin reinforced palm and thumb. Kevlar stitching. Cotton fleece lined. 4-1/2" split cowhide cuff.



GA-TM-007
Premium Goatskin MIG Welding Gloves. Reversed Grain Goatskin leather. Split cuffs. Fleece lined. Kevlar stitched.



GA-TM-008
Top grain cowhide MIG welding gloves. Cowhide split reinforcements with gel padding. Cowhide split back with elastic. Fleece lined. 4" cowhide split cuff. Kevlar stitched.



GA-TM-009
Kevlar Lined Split Cowhide MIG Welding Gloves. Cowhide grain leather palm.



SAFETY GLOVES



LOVES ART MFG CO.

OIL & GAS GLOVES



GA-OG-001
Goat Grain Leather.
TPR Protection.
Kevlar Lining.
Cut Level 4



GA-OG-002
TPR Protection on
knuckles and fingers.
Silicon printing on palm.
Cut level 3.



GA-OG-003
Hi-Vis Impact Work Gloves.
Oil and Gas Resistant Safety Gloves.
Cut level 5
Glove with TPR Protection.



GA-OG-004
Hi-Vis Impact Work Gloves.
TPR Protection.
Silicone printed microfiber palm.
Elasticated wrist.
Cut Level 4.



GA-OG-005
Waterproof Thermal Dorsal Impact-
Reducing glove.
TPR Protection.
Abrasion resistance
Thermal and waterproof for cold weather
applications.



GA-OG-006
Anti-Impact Safety Gloves.
Synthetic Leather palm side.
Kevlar gripper Reinforced Palm.
TPR Protection.
Spandex wrist with elastic hook
and loop closure



GA-OG-007
Palm Made of Synthetic Leather.
Reinforcement Palm in PVC Grippe.
TPR Protection.
Shirred Elastic on Wrist.



GA-OG-008
Cut and TPR Impact Resistant Hand
Protection Insulated Work Gloves.
Anti vibration
Cold resistant.
Excellent grip, especial wet grip.
Anti impact on both palm and back.
Oil resistant.



GA-OG-009
Hi-Vis Breathable Fourway stretch
spandex.
TPR Impact protection at back.
Silicone coated reinforcements on
palm & fingers.
Neoprene Cuff



SAFETY GLOVES



LOVES ART MFG CO.

WORKING GLOVES



GA-CWG-001
Cow split leather rigger with patch palm and vein protection. Pink striped cotton fabric backing increase comfort and ventilation. Lined palm. Rubberized safety cuff.



GA-CWG-002
Cow split leather rigger with patch palm and vein protection. Green striped cotton fabric backing increase comfort and ventilation. Lined palm. Rubberized safety cuff.



GA-CWG-003
Sheep gain leather with patch palm and vein protection. Yellow striped cotton fabric backing increase comfort and ventilation. Lined palm. Rubberized safety cuff.



GA-CWG-004
Canadian Rigger double palm glove, Palm made of natural cow split leather back white cotton, reinforcement on palm, thumb & finger with blue cow split leather, Wing thumb, knuckle strap, rubberized cuff with white piping on edge.



GA-CWG-005
Canadian rigger glove, Palm made of cow split leather, reinforcement on palm, thumb & forefinger with green split leather, back printed fabric, Knuckle strap, Rubberized cuff.



GA-CWG-006
Cow suede leather with patch palm and vein protection. Good quality gloves with the good quality cotton fabric. Unique textured provides a sure grip on objects. Lined palm. Rubberized safety cuff with piping on edge.



GA-CWG-007
Cow grain leather with patch palm and vein protection. Fluorescent fabric back. Lined palm. 8cm Fluorescent Cuff. Shirred Elastic Back.



GA-CWG-008
Cow grain leather with patch palm and vein protection. Fluorescent fabric back. Reflector tape on knuckles. Lined palm. Fluorescent Cuff. Shirred Elastic Back.



GA-CWG-009
Heavy-duty gloves. High quality cowhide suede leather palm. Reinforced leather knuckle patches with reflector tape on it. Cotton fabric backing. Rubberized safety cuff. Fleece lining.



SAFETY GLOVES



LeeFist Hand Care Electrical Hand Gloves



Class	Proof (test) voltage (ms)	Working voltage (ms) max.	Length of Gloves	Size of Gloves
00	2500 volts	500 volts	280mm/360mm	9/10/11
0	5000 volts	1000 volts	280mm/ 360mm / 410mm (460mm	9/10/11
Class 1	10000 volts	7500 volts	360mm/410mm/460mm	9/10/11
Class 2	20000 volts	17000 volts	360mm/410mm/460mm	9/10/11
Class 3	30000 volts	26500 volts	360mm/410mm/460mm	9/10/11
Class 4	40000 volts	36000 volts	410mm/460mm	9/10/11

Features

- Natural Latex
- Smooth Finish
- Soft & Flexible
- Tested Quality





FALL PROTECTION



SAFETYNESTS



FALL PROTECTION



AN513180JWW



ENERGY ABSORBER WITH DOUBLE LANYARD + 1 CARABINER + 2 HOOKS
Ref. AN513180JWW_



Product specifications

Fall arrester with energy absorber in double lanyard webbing (Y). Thimble loops. Equipped with 1 carabiner + 2 hooks.

Straps: Polyester.
Absorber: Polyester.
Carabiner: Steel.

COLOUR
Black-Yellow

SIZE
1,8 m

Product Use - Risks

Fall

Construction / Civil engineering Second work / craftman Heavy industry

Light industry Services / Logistics Oil / Gas

Mining Wind energy

Vertical movement on a permanent structure Short vertical movement or movement on inclined surface (less than 3 m) Short horizontal movement (less than 3 m) Movement on lifeline

Certifications and Standards

USA STANDARDS

ANSI Z359.13-2013 Personal Energy Absorbers and Energy Absorbing Lanyards

References

References	Bar code	COLOUR	SIZE		
AN513180JWW	3295249219604	Black-Yellow	1,8 m	5	-



FALL PROTECTION



HAA01

FALL ARRESTER HARNESS 1 BACK ANCHORAGE POINT
Ref. HAA01_



Product specifications

1 fall arrester anchorage point two colour harness (back). 2 adjustable buckles. MFB chest strap.
Straps: Polyester.

COLOUR
Black-Yellow

SIZE
S/M/L, XL/XXL

Product Use - Risks



Fall



Construction / Civil engineering



Second work / craftman



Heavy industry



Light industry



Services / Logistics



Oil / Gas



Mining



Wind energy



Vertical movement, confined space



Long movement with multi connection / disconnection



Movement on lifeline

Certifications and Standards

USA STANDARDS

ANSI Z359.11-2014 Safety Requirements for Full Body Harnesses

References

References	Bar code	COLOUR	SIZE		
HAA01GT	3295249219543	Black-Yellow	S/M/L	5	-
HAA01XX	3295249219536	Black-Yellow	XL/XXL	5	-



AN213200CDD ENERGY ABSORBING LANYARDS

Fall protection

Applications



- Building
- Finishing Works/Craftsmanship
- Maintenance
- Power Energy
- Storage

Technical details

Color	Orange
SIZE	2 m
Fall arrest work situations	Vertical movement on a permanent structure, Movement on lifeline, Short vertical movement or movement on inclined surface (less than 3 m), Short horizontal movement (less than 3 m), Long movement with multi connection /disconnection



Fall protection

HAR11MFBE

FALL ARRESTER HARNESSES

1 fall arrester anchorage point harness with 2 adjustable buckles



Specific benefits



Hygiene

· Harnesses and textiles can be washed with neutral soap



Performance

· Certification above the maximum rated load of 100 kg: product certified at 140 kg



Easy to use

· NFC system guarantees traceability



Durability

· High webbing tenacity thanks to its weave and width

Certifications and norms



EN361

140 KG

Applications

- Public works
- Building
- Finishing works / Craftsmanship
- Heavy industry
- Light industry
- Maintenance

Technical details

Type of equipment	Fall arrester harness
Composition of the main support	Steel, Polyester
Fastening	Buckles
Number of attachment points	1
Buckles	Manual loop
Anti-fall point	Dorsal
Color	Yellow-Black
Size	S, M, L, XL, XXL
Lifespan from manufacturing (years)	10
Weight (kg)	0.75
Type of packaging	Box of 5
Number of fall arrest anchorage points	1
Dorsal	1
Fall arrest work situations	Vertical movement on a permanent structure, Movement on lifeline, Long vertical movement or movement on inclined surface, Short vertical movement or movement on inclined surface (less than 3 m), Vertical movement, confined space, Long horizontal movement on horizontal surface, Long horizontal movement on vertical structure, Short horizontal movement (less than 3 m), Long movement with multi connection /disconnection

Protects against risks



Fall



Fall protection

HAA26

FALL ARRESTER HARNESSSES

Two colour harness with 2 anchorage points (sternal and dorsal), shoulder rescue points, comfort belt and 2 attachment points for work positioning



Specific benefits



Comfort

· Thermoformed back



Hygiene

· Can wash harnesses and textiles with neutral soap



Ease of Use

· NFC system guarantees traceability



Sustainability

· High webbing tenacity thanks to its weave and width



Visibility

· Anti-fall visual indicator allows for instant verification that product is properly functioning

Certifications and norms

ANSI Z359.11-2014



CSA Z259.10-18

Technical details

Type of equipment	Fall arrester harness with restraint
Composition of the main support	Steel, Polyester
Fastening	Buckles
Number of total holding attachment points	2
Anti-fall point	Dorsal, Sternal
Holding point	Belt
Color	Black-Yellow
Comfort elements	Thermoformed back
Size	S, M, L, XL, XXL
Benefits element	Fall indicator
Lifespan from manufacturing (years)	10
Weight (kg)	2
Number of manual buckles	6
Type of conditioning	Box of 5
Number of fall arrest anchorage points	2
Sternal	1
Dorsal	1
Belt	1
Fall arrest work situations	Vertical movement on a permanent structure, Work positioning, Movement on lifeline, Restraint, Long vertical movement or movement on inclined surface, Short vertical movement or movement on inclined surface (less than 3 m), Vertical movement, confined space, Long horizontal movement on horizontal surface, Long horizontal movement on vertical structure, Short horizontal movement (less than 3 m), Long movement with multi connection /disconnection

Applications

- Agriculture
- Public Works
- Building
- Finishing Works/Craftsmanship
- Heavy Industry
- Light Industry

Protects against risks



Fall





Fall protection

HAA48DA DERRICK

FALL ARRESTER HARNESES

Derrick harness designed specifically for workers who operate the monkey board on oil rigs



Specific benefits



Comfort

· Thermoformed back



Hygiene

· Can wash harnesses and textiles with neutral soap



Ease of Use

· NFC system guarantees traceability



Sustainability

· High webbing tenacity thanks to its weave and width



Visibility

· Anti-fall visual indicator allows for instant verification that product is properly functioning

Certifications and norms

ANSI Z359.11-2014

Technical details

Type of equipment	Fall arrester harness with restraint
Composition of the main support	Steel, Polyester
Fastening	Automatic, Buckles
Number of attachment points	2
Number of total holding attachment points	2
Buckles	Automatic loop
Anti-fall point	Dorsal, Sternal
Holding point	Belt, Rear waistbelt, Lateral
Included elements	Storage bag
Color	Black-Yellow
Comfort elements	Thermoformed back and shorts
Size	S, M, L, XL, XXL
Benefits element	Comfort, Fall indicator
Lifespan from manufacturing (years)	10
Weight (kg)	3.6
Number of manual buckles	7
Type of conditioning	Sold by Unit
Number of fall arrest anchorage points	2
Rear waistbelt	1
Sternal	1
Dorsal	1
Belt	1
Fall arrest work situations	Work positioning, Restraint, Short vertical movement or movement on inclined surface (less than 3 m), Short horizontal movement (less than 3 m)

Applications

- Oil & Gas (Extraction)
- Mining
- Petrochemical
- Power Energy
- Others



Protects against risks



Fall



Fall protection

TC105

FALL ARRESTER AND SUSPENSION HARNESSSES

A seat for a vertical movement



Applications

- Building
- Finishing Works/Craftsmanship
- Maintenance
- Chemical Industry
- Oil & Gas (Extraction)
- Mining

Certifications and norms



Protects against risks



Fall

Technical details

Type of equipment	Seat
Composition of the main support	Polyester
Adjustment	Adjustable length foot rest
Included elements	D-Ring tool holder on both sides
Color	Black-Red
SIZE	One size
Size	One size
Lifespan from manufacturing (years)	10
Weight (kg)	2,2
Use	For vertical movement
Fall arrest work situations	Rescue and evacuation





Fall protection

WALTC114

RESCUE AND EVACUATION

Self rescue device for ascend and descend. Certified for 2 people.



Certifications and norms



EN355

EN 795

TYPE B



Specific benefits



Comfort

- 3D comfort foam integrated into harness that provides comfort and breathability for prolonged use
- Leg strap design allows freedom of movement for long working days
- Helps maintain normal blood circulation after a fall



Ease of Use

- NFC system guarantees traceability



Visibility

- Anti-fall visual indicator allows for instant verification that product is properly functioning

Applications

- Public Works
- Building
- Finishing Works/Craftsmanship
- Heavy Industry
- Light Industry
- Maintenance

Technical details

Composition of the main support	Aluminum, Steel, Polyamide, Polyester
Max. length (m)	300
Number of attachment points	3
Anti-fall point	Dorsal, Sternal
Suspension point	Ventral
Holding point	Belt, Rear waistbelt, Lateral
Color	Black
Benefits element	Fall indicator, Data communication system
Weight (kg)	12.6
Use	Works on braided rope, For ascent and descent, For vertical movement, For 2 people < 225 kg, For confined space



Fall protection

PROTECTOR ELEVATOR TR01830U

RETRACTABLE FALL ARRESTERS

30 metre self retractable fall arrester with rescue option for victim recovery



Specific benefits

Comfort

- Double swivel ensures it will maintain pursuit of user

Performance

- Double swivel design allows optimum tracking and better rewinding of webbing in the housing
- Certification above maximum rated load 100kg: product certified at 150kg

Ease of Use

- Automatic carabiners for secure locking and time saving
- End handle to help wind cable
- Carry handle for easy transport

Certifications and norms



EN360

RFU 11.062
150 KG

EN1496

CLASS A
150 KG

Risk Protection



Fall

Applications

- Building
- Finishing Works/Craftsmanship
- Maintenance
- Chemical Industry
- Oil & Gas (Extraction)
- Mining



Technical details

Type of equipment	Cable reel, winch function
Composition of the main support	ABS (Acrylonitrile Butadiene Styrene), Stainless steel
ARA length (m)	30
ARA length (inch)	1181.103
Cable diameter (mm) (mm)	5
Included elements	Energy absorber
Color	Black-Orange
Connector 1	Small hook, steel, opening 21 mm
Benefits element	Fall indicator
Lifespan from manufacturing (years)	20
Weight (kg)	14,5
Maximum load for one person (kg)	150
Fall arrest work situations	Rescue and evacuation, Vertical movement, confined space
Locking system	Inertia locking system
Use of self retracting	Vertical



Fall protection

PROTECTOR TETRA AN15015T

RETRACTABLE FALL ARRESTERS

Self-retractable cable fall arrester for distances of up to 15 metres



Specific benefits



Performance

- Certification above maximum rated load 100kg: product certified at 150kg



Ease of Use

- Automatic carabiners for secure locking and time saving
- Carry handle for easy transport
- NFC system guarantees traceability



Sustainability

- Impact resistant ABS housing



Visibility

- Anti-fall visual indicator allows for instant verification that product is properly functioning

Certifications and norms



EN360
RFU 11.062
150 KG

Risk Protection



Fall

Applications

- Building
- Maintenance
- Chemical Industry
- Petrochemical
- Storage



Technical details

Type of equipment	Cable reel
Composition of the main support	ABS (Acrylonitrile Butadiene Styrene), Galvanized steel
ARA lenght (m)	15
ARA lenght (inch)	590.5515
Cable diameter (mm) (mm)	4
Included elements	Energy absorber
Color	Black-Orange
SIZE	15 m
Benefits element	Fall indicator
Lifespan from manufacturing (years)	20
Weight (kg)	6,5
Maximum load for one person (kg)	150
Fall arrest work situations	Vertical movement on a permanent structure, Long vertical movement or movement on inclined surface
Locking system	Inertia locking system
Use of self retracting	Vertical



Fall protection

PROTECTOR TETRA AN15006T

RETRACTABLE FALL ARRESTERS

Self-retractable cable fall arrester for distances of up to 6 metres



Specific benefits

Performance

· Certification above maximum rated load 100kg: product certified at 150kg

Ease of Use

· Automatic carabiners for secure locking and time saving
· Carry handle for easy transport
· NFC system guarantees traceability

Sustainability

· Impact resistant ABS housing

Visibility

· Anti-fall visual indicator allows for instant verification that product is properly functioning

Certifications and norms



EN360

RFU 11.062
150 KG

Risk Protection



Fall

Applications

- Building
- Maintenance
- Chemical Industry
- Petrochemical
- Storage



Technical details

Type of equipment	Cable reel
Composition of the main support	ABS (Acrylonitrile Butadiene Styrene), Galvanized steel
ARA length (m)	6
ARA length (inch)	236.2206
Cable diameter (mm) (mm)	4
Included elements	Energy absorber
Color	Orange
Connector 1	Small hook, steel, opening 21 mm
SIZE	6 m
Benefits element	Fall indicator
Lifespan from manufacturing (years)	20
Weight (kg)	5,6
Maximum load for one person (kg)	150
Fall arrest work situations	Vertical movement on a permanent structure, Long vertical movement or movement on inclined surface
Locking system	Inertia locking system
Use of self retracting	Vertical



Fall protection

PROTECTOR EXTRA LARGE AN19060T

RETRACTABLE FALL ARRESTERS

Self-retractable fall arrester in stainless steel cable reel for long distances up to 60 metres.



Applications

- Building
- Chemical Industry
- Oil & Gas (Extraction)
- Petrochemical
- Power Energy
- Storage



Certifications and norms



EN360

Technical details

Type of equipment	Cable reel
Composition of the main support	ABS (Acrylonitrile Butadiene Styrene), Steel
ARA length (m)	60
ARA length (inch)	2362.206
Color	Black-Orange
SIZE	60 m
Benefits element	Fall indicator
Weight (kg)	30,5
Fall arrest work situations	Vertical movement on a permanent structure, Long vertical movement or movement on inclined surface, Long horizontal movement on vertical structure
Use of self retracting	Horizontal, Vertical

Risk Protection



Fall



Fall protection

PROTECTOR EXTRA LARGE AN19060T

RETRACTABLE FALL ARRESTERS

Self-retractable fall arrester in stainless steel cable reel for long distances up to 60 metres.



Applications

- Building
- Chemical Industry
- Oil & Gas (Extraction)
- Petrochemical
- Power Energy
- Storage



Certifications and norms



EN360

Technical details

Type of equipment	Cable reel
Composition of the main support	ABS (Acrylonitrile Butadiene Styrene), Steel
ARA lenght (m)	60
ARA lenght (inch)	2362.206
Color	Black-Orange
SIZE	60 m
Benefits element	Fall indicator
Weight (kg)	30,5
Fall arrest work situations	Vertical movement on a permanent structure, Long vertical movement or movement on inclined surface, Long horizontal movement on vertical structure
Use of self retracting	Horizontal, Vertical

Risk Protection



Fall



WORKBRITE® FLASHLIGHTS

SAFETY SYSTEMS

FLASHLIGHTS & ROAD SAFETY

FLASHLIGHTS




WSB202-Y INTRINSICALLY SAFE FLASHLIGHT

Impact-resistant LED flashlight provides 15 hours of operation time.

- Uses OSRAM Dragon LED
- Intrinsically safe for use in hazardous locations
- Aluminium heat sink helps to enhance LED efficiency
- High impact resistance, tough and durable casing with anti-slip handle
- High impact- and scratch-resistant polycarbonate lens
- Waterproof, rated IP67, dust tight and continuous immersion in 1m
- One hand operation: On/Off
- Brightness: 80 lumens
- Designed reflector for long range lighting up to 122m beam distance
- Peak Beam Intensity : 3752 candela
- Powered by 4 "AA" alkaline batteries
- Length : 17.5cm, Weight : 105g w/o batteries
- UL listed for use in Class I, Div 1, Group A,B,C,D; Class II, Div 1, Group E,F,G; Class III; T4

coverguard™

WSB202-Y





WSB101-Y INTRINSICALLY SAFE FLASHLIGHT

Impact-resistant LED flashlight provides 40 hours of operation time on High mode, and 60 hours on Low.

- Super bright Cree XP-E LED
- Intrinsically safe for use in hazardous locations
- Aluminium heat sink helps to enhance LED efficiency
- High impact resistance, tough and durable casing
- Clip- and clamp-on functions via a two-way position clip
- High impact- and scratch-resistant polycarbonate lens
- Automatic pressure equalization valve
- Waterproof, rated IPX7, immersion up to 1m for 30min
- One hand operation: High/Low/Off
- Operation time: 40 hours (High), 60 hours (Low)
- Designed reflector for long range lighting: 185m (High), 144m (Low)
- Peak Beam Intensity: 6505cd (High), 2850cd (Low)
- Powered by 3 "C" alkaline batteries
- Length : 22.5cm, Weight : 235g w/o batteries.
- UL listed for use in Class I, Div 1 & 2, Group A,B,C,D; Class II, Div 1 & 2, Group E,F,G; Class III; T4



WSB101-Y



BRAND	PRODUCT CODE	DESCRIPTION
WORKBRITE®	WSB202-Y	Intrinsically Safe Flashlight, 4AA OSRAM Dragon LED
	WSB101-Y	Intrinsically Safe Flashlight, 3C CREE XP-E LED



GOLDEN STAR INTERNATIONAL GENERAL TRADING COMPANY W.L.L

FAHAHEEL BLOCK 6, OLIVE TOWER, 2ND FLOOR OFFICE NO. 18

Phone: +965 9724 2524

E-mail: sales@safetynests.com